

Performance Standards for Sustainable, Energy-Efficient Public Buildings

Consolidated Report

Required under G.S. 143-135.39(g)



October 1, 2016



Table of Contents

<u>Title</u>	<u>Page Number</u>
Introduction	3
Performance Review	4
Buildings by County	5
Buildings by Agency	6
Implementation Cost	7
Operational Savings	8
Employee Productivity	8
Program Effectiveness	8
Program Expansion	8
Other Recommendations	9
State Building Commission Report	10
Improvements to Energy-Efficient Standards	10
Conclusions and Findings	11-13
Metered Energy Use	13
Acknowledgements	14
Project Summary Tables	15-94
Sustainable, Energy-Efficient Buildings Advisory Committee Members	95
References	96
Photo Credits	97



Introduction

Per G.S. 143-135.39, commonly known as SB 668¹, the NC Department of Administration is responsible for administering the Sustainable Energy-Efficient Buildings Program. The Department has completed the directives in the statute, including creation of an Advisory Committee, development of policies and technical guidelines, and conducting education and training.

A report from the Sustainable, Energy-Efficient Buildings Advisory Committee can be found on the State Construction Office website along with a series of technical standards for energy and water efficiency². A procedures flow chart is also provided³. The Sustainable, Energy-Efficient Buildings Advisory Committee work was completed during calendar year 2008 as required by the legislation.

Education and training required by the program has consisted of the following:


- *Buildings Efficiency Conference* on October 29 and 30, 2008.
- *Sustainability/Energy Efficiency in Existing Buildings* presentation at the March 23, 2010 State Construction Conference.
- Life Cycle Cost Panel Discussion at the March 24, 2011 State Construction Conference.
- *Senate Bill 668 – A Case Study* presentation at the March 22, 2012 State Construction Conference.
- *Senate Bill 668 – The Sequel - The Case Studies* presentation at the March 28, 2013 State Construction Conference.
- *A Review of Performance of “High Performance Buildings”* presentation at the December 5, 2013 Triangle: GreenNC 2013- Symposium for A/E/C⁴.
- *Senate Bill 668 – Judgment Day* presentation at the March 27, 2014 State Construction Conference.
- *Commissioning Finds & Solutions* presentation at the March 26, 2015 State Construction Conference.
- *Building Performance Monitoring & Tracking* at the April 21-22, 2015 State Energy Conference.
- Ongoing design review and performance evaluation of state facilities required to comply with the legislation by the State Construction Office.
- State Construction Office participation in the High Performance Buildings (HiPerB) Task Force⁵ quarterly meetings to share experiences and lessons learned in the design, construction and operation of energy efficient buildings.
- The State Construction Office homepage⁶ includes the SCO Energy Benchmarking Project⁶. The SCO Energy Benchmarking Project⁷ contains basic performance data for each building designed under the legislation. The Project data is updated approximately once a month.
- *Energy Efficient Lighting Guidance Document for New Construction and Retrofits* document March 2016⁸.
- *Solid State Lighting* presentation at the March 24, 2016 State Construction Conference⁹.
- *Building Energy Performance / Trusting the Numbers* at the 2016 Appalachian Energy Summit, July 18-20, 2016¹⁰. Co-presented with the NC Department of Environmental Quality, Utility Savings Initiative ¹¹.

Performance Review

As part of the Sustainable, Energy-Efficient Buildings legislation, the Department is responsible for providing a consolidated report, including a performance review, State Building Commission report, and recommendations for improving the standards. The following information makes up the consolidated report.




Buildings by County

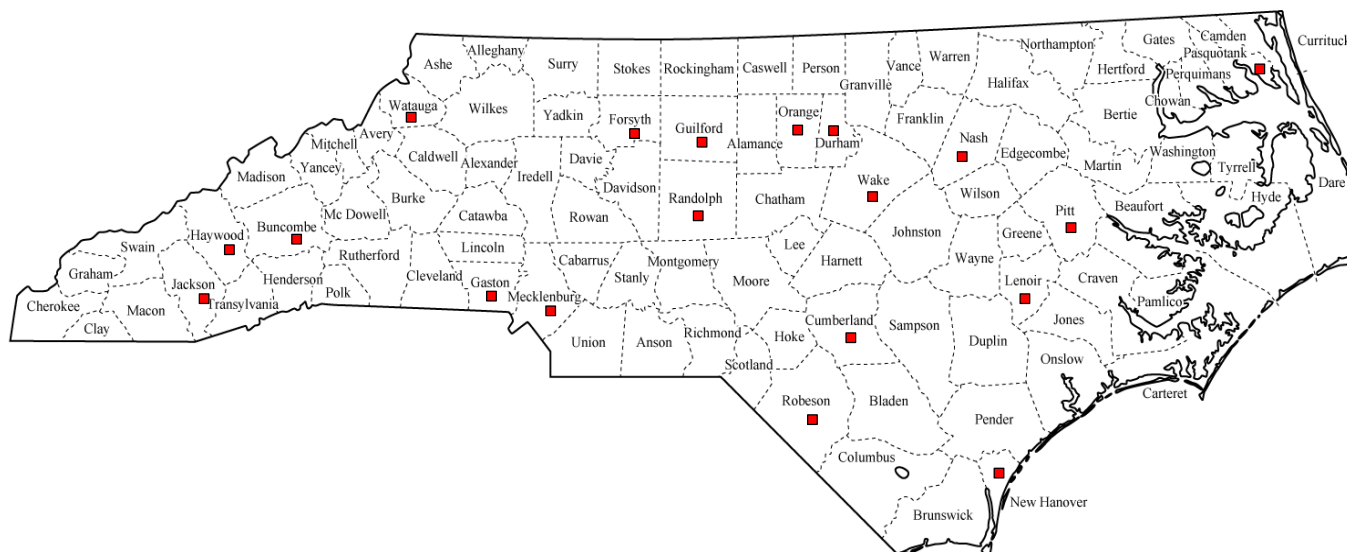

County	Number of Buildings	*Total Project Cost Public \$	% of Total Project Cost
Buncombe	4	\$ 48,628,346	3%
Cumberland	3	\$ 37,728,521	3%
Durham	2	\$ 43,927,192	3%
Forsyth	8	\$ 85,116,661	6%
Gaston	1	\$ 5,232,784	0%
Guilford	15	\$ 102,258,726	7%
Haywood	1	\$ 9,316,286	1%
Jackson	1	\$ 14,587,035	1%
Lenoir	1	\$ 14,088,404	1%
Mecklenburg	12	\$ 332,533,907	24%
Nash	1	\$ 12,224,888	1%
New Hanover	5	\$ 125,132,865	9%
Orange	1		0%
Pasquotank	2	\$ 30,396,623	2%
Pitt	4	\$ 114,419,690	8%
Randolph	1	\$ 6,774,300	0%
Robeson	2	\$ 21,333,365	2%
Wake	11	\$ 323,052,507	23%
Watauga	4	\$ 76,495,363	5%
Total (19 Counties)	79	\$ 1,403,247,463	100%
		* Private \$ amounts are not available or included.	

Buildings by Agency

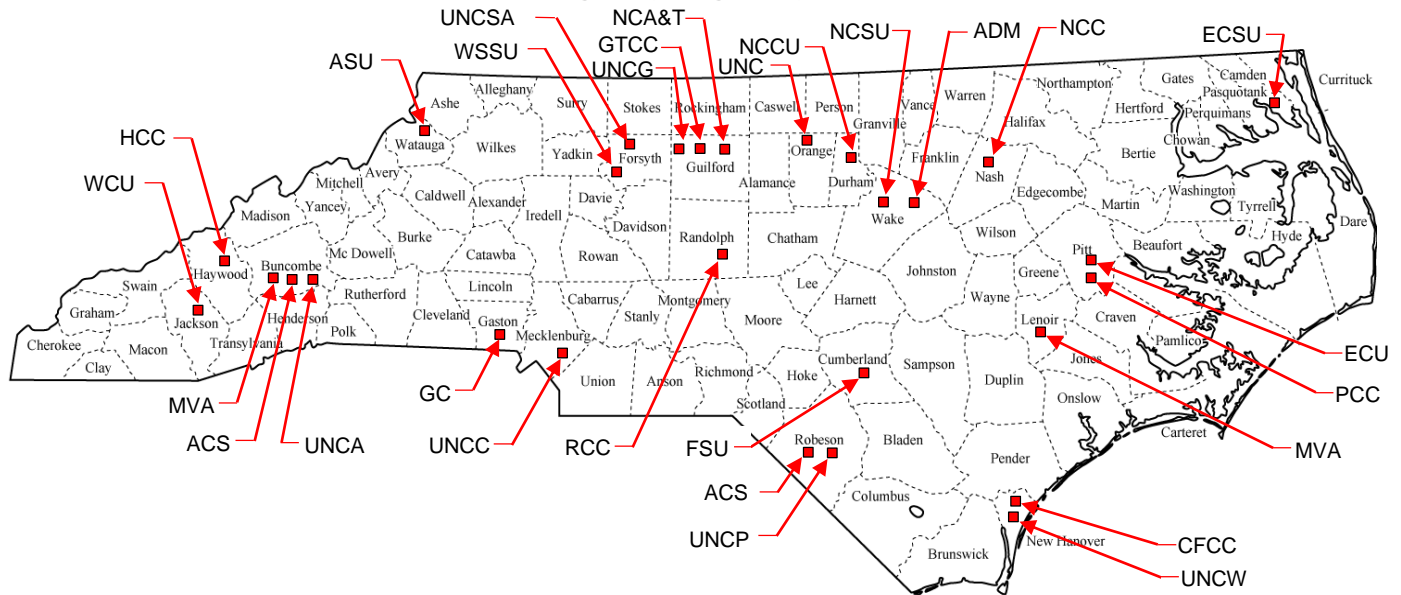

Agency	Number of Buildings	*Total Project Cost Public \$	% of Total Project Cost
Administration (ADM)	1	\$ -	0%
Military & Veteran's (MVA)	2	\$ 31,570,445	2%
Ag and CS (ACS)	2	\$ 10,500,585	1%
ASU	4	\$ 76,495,363	5%
Cape Fear CC (CFCC)	1	\$ 44,492,096	3%
ECSU	2	\$ 30,396,623	2%
ECU	3	\$ 105,988,293	8%
FSU	3	\$ 37,728,521	3%
Gaston College (GC)	1	\$ 5,232,784	0.4%
Guilford TCC (GTCC)	1	\$ 7,371,349	1%
Haywood CC (HCC)	1	\$ 9,316,286	1%
Nash CC (NCC)	1	\$ 12,224,888	1%
NCA&T	1	\$ 8,280,900	1%
NCCU	2	\$ 43,927,192	3%
NCSU	10	\$ 323,052,507	23%
Pitt CC (PCC)	1	\$ 8,431,397	1%
Randolph CC (RCC)	1	\$ 6,774,300	0%
UNCA	2	\$ 25,093,065	2%
UNCC	12	\$ 332,533,907	24%
UNCCH	1	\$ -	0%
UNCG	13	\$ 86,606,477	6%
UNCP	1	\$ 16,886,020	1%
UNCSA	4	\$ 35,414,214	3%
UNCW	4	\$ 80,640,769	6%
WCU	1	\$ 14,587,035	1%
WSSU	4	\$ 49,702,447	4%
Total (26 Agencies)	79	\$ 1,403,247,463	100%

* Private \$ amounts are not available or included.

Implementation Cost

The first requirement in the performance review deals with the cost of implementing the energy-efficiency and water use standards. In budgeting funds for new buildings, it is estimated that a premium of between 2% and 4% should be added to account for energy-efficient design and construction¹². This premium includes additional design costs such as advanced planning and computer modeling of the buildings, as well as additional cost for commissioning. Additional construction costs for high-efficiency building systems are also included in the premium.

Implementation costs from data analyzed for 79 buildings completed under the program follow.

- Advanced planning fees for the 79 buildings completed under the program include project programming and budgeting which are not specifically related to saving energy. Unless specifically noted to include fees for energy modeling or LEED related expenses, advanced planning fees have not been included.
- Additional design fees for the 79 buildings completed under the program range from 0% to 2.03% of the construction cost with an average of 0.31% and a median of 1.02%. The average decreased slightly again this year due to seven projects having no additional design fees. Many agencies voluntarily elect to pursue LEED accreditation for their projects separate from the requirements of this program. LEED accreditation also adds cost to the project that is included in the additional design fees noted here.
- Commissioning for the 79 buildings completed under the program have fees ranging from 0.29% to 2.28% of the construction cost with an average of 0.69% and a median of 0.71%. The lower percentage fees can be attributed to less complex and larger buildings while the higher percentage fees can be attributed to more complex and smaller buildings indicating that size and complexity matter when considering commissioning costs. Note that LEED certification also requires commissioning. 69 buildings received third party commissioning while ten buildings were not commissioned.
- Construction costs for energy saving systems have been estimated based on the designer's life cycle cost analysis and then deducted from the construction bid price for the project. The additional construction cost range from 0% to 24% of the construction bid price with an average of 5.48% and a median of 12%. Note the designer's estimate is compared to construction bid prices. Both the designer's estimates and contractor's bid prices change with market conditions. The designer's estimates are required by statute to be less than the construction budget to help insure the projects are bid within budget.
- Total implementation cost for the 79 buildings completed under the program range from less than 1% to 25% with an average of 6.46% and a median of 12%. The low and high percentages are outliers and not the norm. The additional costs noted here are more than national averages of 2% to 4%¹². The data consists of estimates from the designer of record for the baseline building and the bid amount from the contractor awarded the project for the proposed or to be built building. Inaccurate designer estimates result in low or high implementation costs for the program.
- Additional costs associated with compliance with the program are decreasing slightly with the additional buildings in the data set and a better understanding of the work involved with compliance.
- Implementation Cost for each building is included on the *Project Summary Tables* on pages 15 through 95.

Operational Savings

The second requirement in the performance review deals with operating savings, particularly the utility savings. Standards are in place to ensure that buildings are designed to use 30% less energy and 20% less water than a basic code-compliant building, including forms to be completed and certified by the architect and engineer of record. 79 buildings have been completed and the project data required by the performance review is attached. Note the meter data is not conclusive due to a lack a steam or heating hot water utility meter and chilled water utility meter data for facilities connected to campus thermal utilities. Also, electrical and natural gas sub-meter data has proved difficult to obtain on sites or campuses with multiple buildings. Some owners charge utilities based on building size or square footage instead of metered utility consumption.

Employee Productivity

The third requirement in the performance review dealing with impacts on employee productivity are difficult to quantify with engineering analysis and have yet to be determined. Independent studies¹³ have shown there are positive effects to employee productivity and visual satisfaction with the use of day-lighting and other features associated with energy efficient design.

Program Effectiveness

The fourth requirement in the performance review deals with program effectiveness. The legislation and the standards developed to administer the program have been effective in requiring architects and engineers to design new buildings that are 30% more energy-efficient than code and renovated buildings that are 20% more energy-efficient than code. The standards developed require all buildings designed to use 20% less water. The reporting forms certified by the engineer of record provide documentation to validate the improvements in energy-efficiency and water use. Accurate energy model data provided by design teams has proved difficult to obtain. Accurate meter data provided by the owners has proved difficult to obtain as noted in the *Project Summary Tables* on pages 15 through 95.

The possible need for additional, stricter standards is addressed under the Improvements to Energy-Efficiency Standards section below.

Program Expansion

The fifth requirement in the performance review deals with expanding the program to include additional facilities. The size of buildings subject to this legislation, 20,000 square feet and larger, is a valid minimum for energy modeling and metering. Applying the standards to smaller buildings, with a few exceptions such as power plants and data centers, would reach diminishing returns and is not recommended.

Water savings can be achieved with the use of low flow plumbing fixtures in all state owned or supported facilities with no or little additional cost and with no loss of fixture performance. The program should be expanded to require low flow plumbing fixtures installed in all new and renovated facilities for additional water savings in buildings not currently impacted by the legislation.

House Bill 628 or Session Law 2013-242¹⁴ amended the program by adding definition “(a1) Net Savings Required.” The definition added by the amendment requires a maximum simple

payback of 10 years for implementation of the program beginning with projects initiated on or after October 1, 2013. HB 628 has reduced the program instead of expanding the program. Twenty projects have been studied since the implementation of HB 628:

- 18 projects did not indicate a favorable net savings required and are not subject to comply with SB 668.
- 2 projects elected to voluntarily comply with SB 668.

Other Recommendations

The sixth and final requirement in the performance review deals with other recommendations. The year 2011, 2012, 2013, 2014 and 2015 Performance Reviews noted the Advisory Committee had identified technical corrections needed for the energy-efficiency statutes. The following technical corrections are repeated for the year 2016 Performance Review:

- 143-135.37(a) should be revised for compliance with the legislative intent stated in 143-135.35. The current wording allows major facilities financed entirely through local funding to avoid compliance with the program requirements. The language in regards to funding from “an appropriation in the State capital budget or through a financing contract” should be removed from the statute.
- 143-135.37(c1) should change the word “stormwater” to “groundwater” throughout to accordance with Senate Bill 668 and the definition of “potable”, as groundwater is typically potable, but stormwater is not.
- 143-135.37(c) replace the building code language to “on the basis of conventional irrigation of landscaped areas” since there are no irrigation requirements addressed by the North Carolina State Building Codes.

Recommendations:

- Indoor water consumption references the 2006 North Carolina Plumbing Code. Two building code cycles have passed since the program went into effect. All code references should be corrected to indicate current code instead of reference to a specific year. Note that changing to the current North Carolina Plumbing Code will not change maximum water consumption rates for plumbing fixtures since the code requirements have not changed.
- An emphasis on cost savings will help reduce utility costs through rate negotiations with the public utility and installation of peak shaving systems such as thermal storage. Currently, there are no rewards in the energy-efficiency legislation for achieving energy cost savings. The year 2011, 2012, 2013, 2014 and 2015 Performance Reviews also noted it would be helpful to reference energy cost savings in the legislation.
- The program requires the water savings to be measured in gallons. There is no requirement to model the cost savings associated with the water savings and compare the modeled cost to the actual cost of water consumed. It would be helpful to reference water cost savings in the legislation.
- Value engineering and other programmatic changes to bring a project within the construction budget often removes from the project key components used to bring the building into compliance with the program. An example is removing automated heating and cooling controls and replacing with manual heating and cooling controls. A one-year post occupancy, calibrated energy model should be required to evaluate the impact of

value engineering and other design, construction and operational changes on the building energy consumption.

- Encourage building owners to input, track and compare building energy consumption through EPA Energy Star Portfolio Manager¹⁵. Building owners can compare their buildings to similar buildings from statewide to regionally to nationwide.
- Require post occupancy analysis with ASHRAE Standard 100-2015, Energy Efficiency in Existing Buildings¹⁶.

State Building Commission Report

There have not been any applications to the State Building Commission to exempt a project from the requirements of the Sustainable Energy-Efficient Buildings Program.

Improvements to Energy-Efficient Standards

Under G.S 143-135.40, the Department is responsible for monitoring the development of improved energy-efficiency standards and recommending stricter or additional requirements.

The Sustainable Energy-Efficient Buildings Program standards described in G.S. 143-135.37(b) require a new building to be 30% more efficient than ASHRAE 90.1-2004 and a renovated building to be 20% more efficient than ASHRAE 90.1-2004. The 2006 North Carolina Energy Conservation Code (NCECC) was in effect when the program was implemented and the 2006 NCECC referenced ASHRAE 90.1-2004.

The 2012 NCECC¹⁷ has been amended to require compliance with ASHRAE 90.1-2010¹⁸. ASHRAE 90.1-2010 has been shown to be 30% more efficient than ASHRAE 90.1-2004 which is equivalent to the program. The current or 2012 NCECC meets the energy efficiency requirements of SB 668 for new buildings and exceeds the energy efficiency requirements of SB 668 for renovated buildings.

The following improvements should be made:

- New buildings should be changed to meet the requirements of ASHRAE 90.1-2010. This change will continue to meet the energy efficiency requirements stated in the program and exceed the code requirements stated in the 2012 NCECC.
- Renovated buildings should be changed to meet the requirements of ASHRAE 90.1-2010. This change will meet the energy efficiency minimum requirements in the 2012 NCECC and exceed the program requirements of being 20% better than ASHRAE 90.1-2004.
- Future Improvements to the Energy -Efficient Standards should include compliance with ASHRAE 90.1-2013. Studies have indicated a 7.6% improvement over ASHRAE 90.1-2010¹⁹.

Indoor water consumption is required to be tracked as part of the program, but there is no cost of water required to be tracked. The program should include calculating the baseline cost of water along with the metered cost of water.

The life-cycle cost manual was last updated in year 2001²⁰ and is recommended for update in coordination with updates to the Sustainable Energy-Efficient Buildings Program. Third party solicitations and award should be made for the updating the life-cycle cost manual. The estimated cost to provide a completely updated and new life-cycle cost manual is \$300,000.

Conclusions and Findings

Performing the analysis to develop this performance review of the actual data and comparison to the energy model and life cycle cost analysis has given State Construction Office data to share with agencies and institutions and designers to further develop and refine the program and provide realistic results. Individual building findings are noted in the *Project Summary Tables* section. The buildings are listed in order of acceptance by the State Construction Office on behalf of the State of North Carolina.

Note that 50 of the 79 buildings completed under the program were required by the owning agency to meet the requirements of LEED certification independent of the energy and water savings legislation. LEED and the energy and water savings legislation have many of the same goals except the energy and water savings legislation requires meter data to be collected and compared to the modeled energy data while LEED does not. Current versions of LEED require meter data to be collected.

Energy and water utility meter data for the 79 buildings completed under the program continues to be inconsistent due to no meters, bad meters, lack of data, etc. Energy and water utility meter data should continue to be analyzed to gain confidence in the collection and tracking of the data. The building model data should also be analyzed against other state owned facility models along with national and regional averages for similar buildings.

- 118 buildings have been studied since the legislation was passed and implemented on August 8, 2008.
- 79 buildings have been accepted, occupied for at least one year and meter data received. These 79 buildings are presented in detail in the *Project Summary Tables* section.
- 18 buildings have been completed and one year of meter data received with the current sampling or fifth year (2015).
 - One building was accepted during the first year (2010)
 - Seven buildings were accepted during the second year (2011)
 - 19 buildings were accepted during the third year (2012)
 - 25 buildings were accepted during the fourth year (2013)
 - Nine buildings were accepted during the fifth year (2014)
 - 18 buildings were accepted during the sixth year (2015)
 - Note the significant increase in buildings in years three (2012) and four (2013) are due to the following:
 - Advance planning, programming and design typically takes 18 to 24 months.
 - Construction typically takes 18 to 24 months.
 - Meter data after acceptance is 12 months.
 - Total time is 48 months (4 years) to 60 months (5 years).
- Four buildings have been accepted and occupied in the past year (2015-2016) and will be included in the report for October 1, 2017. The building total at that time will be 83.
- Eight buildings are under construction with expected completion dates in time to be included in the October 2018 report. The building total at that time will be 91.
- The smallest building completed to date is the Campus Police Facility at the UNC School of the Arts at 9,023 gross square feet. The Campus Police Facility will be included in the October 1, 2016 report. This facility is below the 20,000 square foot minimum for

complying with the legislation, but the using agency voluntarily elected to comply with the legislation.


- The largest building completed to date is NCSU Talley Student Center at 294,736 gross square feet. Talley was accepted on May 7, 2015. Metered energy performance has not met modeled energy performance. NCSU is analyzing meter performance and data to reconcile metered and modeled energy performance.
- UNC Greensboro has the most buildings completed under the legislation with 13 buildings, eleven residence halls, one police station and one dining hall. Seven of the residence halls were renovations and four of the residence halls were new construction. The dining hall was a complete renovation with a small addition.
- Guilford County has the most buildings completed under the legislation with 15 buildings, 13 at UNC Greensboro, one classroom building at Guilford Technical Community College and one student health center building at NCA&T.
- Modeling data for the 79 buildings presented ranges from low to extremely high as compared to similar buildings. SCO is tracking the buildings analyzed under the program and advising designers when buildings are out of range. The SCO Energy Benchmarking Project is available for owners and designers to compare proposed buildings to existing similar state owned facilities⁷.
- Metered utility data collected by the agencies has been inconsistent. Examples include water consumption at a dormitory indicating 148 gallons/student/year which is unrealistically low, to no steam utility data, and to total building energy consumption that is below local, regional and national averages.
- Steam utility meters continue to be difficult in obtaining accurate readings. A more reliable, but less accurate option is to use condensate meters.
- Indoor water consumption for facilities other than residence halls is difficult to model and predict.
- Metered indoor water consumption for residence halls averages 7,766 gallons/student/year for the 32 residence hall metered to date. This information is used in guiding designers and owners on future residence hall projects.
- Utility rates used in the energy model do not always agree with the energy rates billed to the owner. Put another way, incorrect utility rates were used in the model. Metered energy consumption can exceed modeled energy consumption while metered energy cost for the same building will be less than modeled energy cost.
- Commissioning typically continues during the first year of occupancy and meter data which indicates energy consuming systems are still being fine-tuned at the same time as the first year of energy consumption data.
- Some owners are metering central campus thermal utilities based on the size of the building in square feet instead of actual utility consumption.
- Obtaining accurate and consistent meter data has been the greatest challenge in fulfilling the requirements of the legislation for the following reasons:
 - Meters were not part of the design and construction.
 - Meters were removed from the project due to budget or for cost savings.
 - Meters have not been read.
 - Meters were not properly installed.
 - Meters are not operating or reporting accurately.
 - Facilities billed by size or square footage instead of utilities used or consumed.

Additional findings not required by the legislation follow:

- 8851 residence hall beds have been renovated or added.
- 34 residence halls have had meter data collected, the largest occupancy or category of building use.
- 6,548,386 gross square feet of building have been renovated or added to the state inventory under the program.
- Modeled energy savings equates to 223,945,000,000 Btus/year or enough energy to power 3,111 homes²¹ for a year.
- Modeled energy savings represents a 33% improvement over code compliant buildings.
- Modeled energy savings, or avoided energy costs, in dollars equals \$3,778,069/year.
- Modeled energy savings, or avoided energy costs, in dollars represents a 33% improvement over code compliant buildings.
- Modeled water savings equates to 48,542,961 gallons/year or enough water to fill 73 Olympic size swimming pools every year.
- Total project costs equal \$1,403,247,463 which includes construction, design fees and commissioning fees for projects completed with public, not foundation, monies. Foundation project funding is not included in this total.

Metered Energy Use

The following chart represents metered site energy use intensity or EUI (kbtu/sqft/year) for the 59 buildings with meter data for 2016. The median or average EUI is 96. The 2016-meter data includes 14 more buildings than sampled in 2015. The 2016 EUI has decreased from 112 to 96, a reduction of 14%.

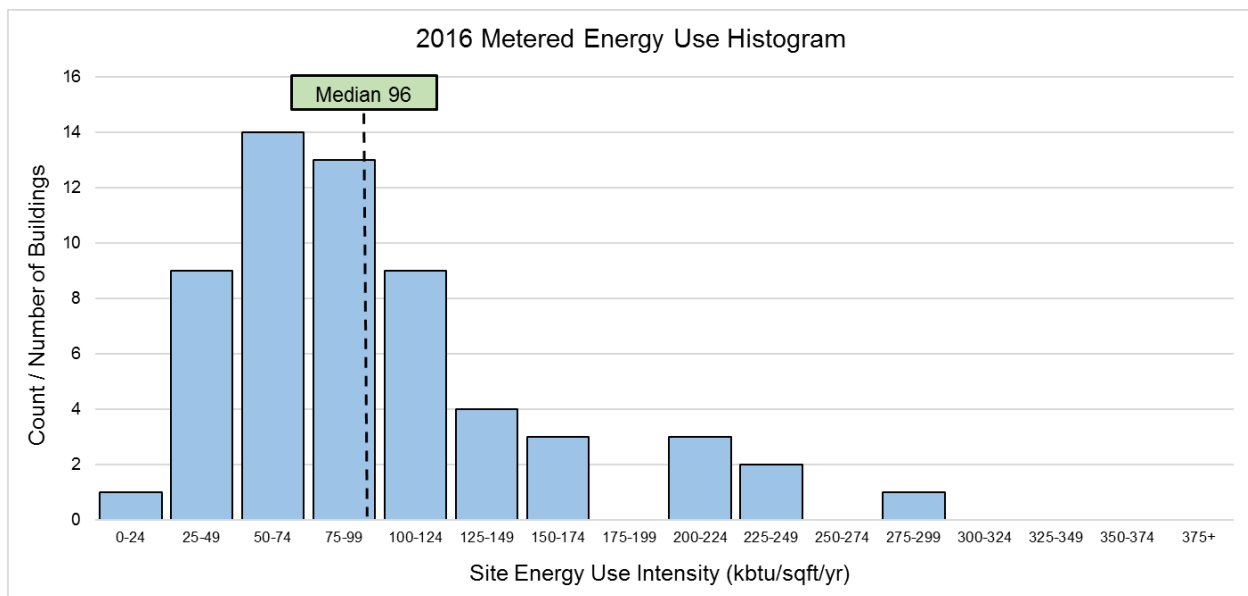

Acknowledgements

The State Construction Office, NC Department of Administration prepared the consolidated report. Owning agencies contributed to the content of the report.

The State Construction Office, NC Department of Administration wishes to express appreciation to the members of the Sustainable, Energy-Efficient Buildings Advisory Committee for providing their time and expertise to work on the Committee.



Submitted by: State Construction Office

Engineering Supervisor, Leonard Thagard
leonard.thagard@doa.nc.gov / 919-807-4093

Project Summary Tables

Project summaries for the 79 buildings accepted and occupied for at least one year are presented over the next 79 pages with the buildings in order of acceptance.



2015-2016 Performance Standards Review

Appalachian State University

Cone Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 8,538,280
Project Size (SF)	58,803
Cost/Square Foot	\$ 145
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 832,067
B Additional Design Fees	\$ 58,613
C Total Design Fee	\$ 890,680
% of Total Gen Cont(G)	0.77%
D Commissioning Fees (Cx)	\$ 62,500
% of Total Gen Cont(G)	0.82%
E Estimated Basic Costs	\$ 5,965,486
F Estimated Additional Costs	\$ 1,619,614
G Total General Contract	\$ 7,585,100
% of Total Gen Cont(G)	21%
H Baseline Utilities Cost	\$ 81,830
I Metered Utilities Cost	\$ 112,434
J Avoided Utility Cost	\$ (30,604)
K % Avoided Utility Cost	-37%

Indoor Water (Gallons)

Baseline Water Use	2,000,376
Metered Water Use	1,709,231
Avoided Water Use	291,145
% Avoided Water Use	15%

Total Additional Fees & Costs

Additional Design Fees	\$ 58,613
Commissioning Fees (Cx)	\$ 62,500
Estimated Additional Costs	\$ 1,619,614
Total	\$ 1,740,727
% of Total Gen Cont(G)	23%



Cone Residence Hall Renovation is an eight story high rise residence hall that houses 278 students. Cone was first presented as a case study at the 2012 State Construction Conference and again at the 2013 and 2014 State Construction Conferences. Cone was accepted on June 23, 2010. This is the sixth year of meter data for Cone.

The six years of metered energy and water consumption has been higher than the modeled energy and water consumption, but was still lower than national averages. Further analysis revealed the modeled energy consumption was low for a residence hall, lower than other residence halls studied for this report.

Additional construction costs are inflated due to replacement of the windows and plumbing fixtures.

ASU is working to provide correct metering.

Cone does not meet the requirements of the legislation due to the low modeled energy consumption as noted above.

(1) <http://www.usgbc.org/projects/asu-cone>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Prospector Hall Renovation

Basic Project Data		
Total Project Cost	\$	4,389,300
Project Size (SF)		22,705
Cost/Square Foot	\$	193
LEED Certification		None
Fees and Costs		
A Basic Design Fee	\$	295,000
B Additional Design Fees	\$	-
C Total Design Fee	\$	295,000
% of Total Gen Cont(G)		0.00%
D Commissioning Fees (Cx)	\$	65,100
% of Total Gen Cont(G)		1.62%
E Estimated Basic Costs	\$	3,944,812
F Estimated Additional Costs	\$	84,388
G Total General Contract	\$	4,029,200
% of Total Gen Cont(G)		2%
H Baseline Utilities Cost	\$	30,538
I Metered Utilities Cost	\$	102,257
J Avoided Utility Cost	\$	(71,719)
K % Avoided Utility Cost		-235%
Indoor Water (Gallons)		
Baseline Water Use		48,654
Metered Water Use		969,064
Avoided Water Use		(920,410)
% Avoided Water Use		-1892%
Total Additional Fees & Costs		
Additional Design Fees	\$	-
Commissioning Fees (Cx)	\$	65,100
Estimated Additional Costs	\$	84,388
Total	\$	149,488
% of Total Gen Cont(G)		4%



Prospector Hall is a two story dining facility and student center. Prospector was accepted on May 30, 2011. This is the fifth year of meter data for Prospector Hall partial renovation.

Modeled energy and water consumption is for the renovated area only. The metered energy and water usage is for the partial renovation and existing building combined. Therefore, the metered consumption for the partial renovation and existing building is much greater than just the partial renovation and the resulting energy savings is a negative number and percentage. The same comparison exists with the indoor water consumption data where the addition is compared to the partial renovation and existing building combined. Also, Prospector Hall is a dining facility and the indoor water consumption did not include water consumption for food service preparation and cleaning which was considered process load.

Prospector does not meet the requirements of the legislation.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Miltimore Residence Hall

Basic Project Data

Total Project Cost	\$ 35,978,870
Project Size (SF)	173,086
Cost/Square Foot	\$ 208
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 2,747,550
B Additional Design Fees	\$ 58,700
C Total Design Fee	\$ 2,806,250
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 177,000
% of Total Gen Cont(G)	0.54%
E Estimated Basic Costs	\$ 32,995,620
F Estimated Additional Costs	\$ -
G Total General Contract	\$ 32,995,620
% of Total Gen Cont(G)	0%
H Baseline Utilities Cost	\$ 478,677
I Metered Utilities Cost	\$ 143,089
J Avoided Utility Cost	\$ 335,588
K % Avoided Utility Cost	70%

Indoor Water (Gallons)

Baseline Water Use	6,961,135
Metered Water Use	4,889,384
Avoided Water Use	2,071,751
% Avoided Water Use	30%

Total Additional Fees & Costs

Additional Design Fees	\$ 58,700
Commissioning Fees (Cx)	\$ 177,000
Estimated Additional Costs	\$ -
Total	\$ 235,700
% of Total Gen Cont(G)	1%



Miltimore Residence Hall was the third building completed under the program. Miltimore is a five story residence hall that houses 431 students. Miltmore was accepted on July 19, 2011. This is the fifth year of meter data for Miltimore.

Modeled energy consumption is the highest presented for any state owned residence hall and greatly exceeds the national and regional averages for residence halls. Otherwise the metered utility use meets the expectations for similar residence hall buildings.

Miltimore meets the requirements of the legislation for energy and water use reductions due to the high modeled energy consumption compared to a typical residence hall.

(1) <http://www.usgbc.org/projects/unc-charlotte-phase-ix-residence-housing>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design ammendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Central University

Nursing Building

Basic Project Data

Total Project Cost	\$ 18,359,406
Project Size (SF)	69,610
Cost/Square Foot	\$ 264
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 1,795,875
B Additional Design Fees	\$ 99,050
C Total Design Fee	\$ 1,894,925
% of Total Gen Cont(G)	0.61%
D Commissioning Fees (Cx)	\$ 265,694
% of Total Gen Cont(G)	1.64%
E Estimated Basic Costs	\$ 16,003,466
F Estimated Additional Costs	\$ 195,321
G Total General Contract	\$ 16,198,787
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 148,249
I Metered Utilities Cost	\$ 80,478
J Avoided Utility Cost	\$ 67,771
K % Avoided Utility Cost	46%

Indoor Water (Gallons)

Baseline Water Use	871,150
Metered Water Use	1,561,671
Avoided Water Use	(690,521)
% Avoided Water Use	-79%

Total Additional Fees & Costs

Additional Design Fees	\$ 99,050
Commissioning Fees (Cx)	\$ 265,694
Estimated Additional Costs	\$ 195,321
Total	\$ 560,065
% of Total Gen Cont(G)	3%



Nursing Building was the fourth building completed under the program. Nursing Building was recently discovered to have been absent from the data collection associated with the energy legislation. Nursing was accepted on August 5, 2011. This is the fifth year of meter data for Nursing.

Metered energy consumption for Nursing Building does not include steam consumption. The steam meter was not operational for the 2014/2015 reporting period and again this year. The electrical and steam submeters were not operational which has been and continues to be a recurring theme for buildings on campus utilities.

Nursing Building does not meet the requirements of the legislation due to incomplete meter data.

(1) <http://www.usgbc.org/projects/school-nursing>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Central University

Chidley Residence Hall



Chidley Residence Hall was the fifth building completed under the program. Chidley is a four story residence hall that houses 528 students. Chidley was accepted on August 10, 2011. This is the fifth year of meter data for Chidley.

Metered energy consumption for Chidley does not include steam consumption. The steam meter was not operational for the 2014/2015 reporting period. The steam submeter was not operational which has been and continues to be a recurring theme for buildings on campus utilities.

Metered water usage is 12,055 gallons/student/year which is approximately 4,000 gallons more than average for this report.

Chidley does not meet the requirements of the legislation due to incomplete meter data.

Meter data presented is not complete.

(1) <http://www.usgbc.org/projects/chidley-north-residence-hall>

Basic Project Data

Total Project Cost	\$ 25,567,786
Project Size (SF)	133,570
Cost/Square Foot	\$ 191
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 2,012,550
B Additional Design Fees	\$ 173,500
C Total Design Fee	\$ 2,186,050
% of Total Gen Cont(G)	0.75%
D Commissioning Fees (Cx)	\$ 104,934
% of Total Gen Cont(G)	0.45%
E Estimated Basic Costs	\$ 21,956,196
F Estimated Additional Costs	\$ 1,320,606
G Total General Contract	\$ 23,276,802
% of Total Gen Cont(G)	6%
H Baseline Utilities Cost	\$ 292,778
I Metered Utilities Cost	\$ 52,639
J Avoided Utility Cost	\$ 240,139
K % Avoided Utility Cost	82%

Indoor Water (Gallons)

Baseline Water Use	6,283,057
Metered Water Use	1,351,127
Avoided Water Use	4,931,930
% Avoided Water Use	78%

Total Additional Fees & Costs

Additional Design Fees	\$ 173,500
Commissioning Fees (Cx)	\$ 113,132
Estimated Additional Costs	\$ 1,320,606
Total	\$ 1,607,238
% of Total Gen Cont(G)	7%

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Chapel Hill

The Loudermilk Center for Excellence

Basic Project Data

Total Project Cost	Not Available
Project Size (SF)	170,189
Cost/Square Foot	Not Available
LEED Certification	None

Fees and Costs

A Basic Design Fee	Not Available
B Additional Design Fees	
C Total Design Fee	
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	Not Available
% of Total Gen Cont(G)	
E Estimated Basic Costs	Not Available
F Estimated Additional Costs	
G Total General Contract	
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 116,674
I Metered Utilities Cost	\$ 271,145
J Avoided Utility Cost	\$ (154,471)
K % Avoided Utility Cost	-132%

Indoor Water (Gallons)

Baseline Water Use	1,518,337
Metered Water Use	2,683,000
Avoided Water Use	(1,164,663)
% Avoided Water Use	-77%

Total Additional Fees & Costs

Additional Design Fees	
Commissioning Fees (Cx)	
Estimated Additional Costs	
Total	Not Available
% of Total Gen Cont(G)	



Loudermilk Center was the sixth building completed under the program and is a foundation project funded by The Rams Club. Therefore, construction and design cost data is not available. Loudermilk was accepted on August 18, 2011. This is the fifth year of meter data for Loudermilk.

The baseline or modeled utilities cost are low when compared to comparable buildings while the metered utilities cost is typical for this type of facility. The negative avoided utility cost is due to the low baseline cost not due to an inefficient building.

Loudermilk does not meet the requirements of the legislation since metered energy use exceeds modeled energy use.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Department of Agriculture and Consumer Services

Davis Arena Addition and Renovation

Basic Project Data

Total Project Cost	\$ 6,053,240
Project Size (SF)	67,904
Cost/Square Foot	\$ 89
LEED Certification	In Progress (1)

Fees and Costs

A	Basic Design Fee	\$ 469,000
B	Additional Design Fees	\$ 33,000
C	Total Design Fee	\$ 502,000
	% of Total Gen Cont(G)	0.60%
D	Commissioning Fees (Cx)	\$ 43,640
	% of Total Gen Cont(G)	0.79%
E	Estimated Basic Costs	\$ 5,351,000
F	Estimated Additional Costs	\$ 156,600
G	Total General Contract	\$ 5,507,600
	% of Total Gen Cont(G)	3%
H	Baseline Utilities Cost	\$ 72,840
I	Metered Utilities Cost	\$ 61,510
J	Avoided Utility Cost	\$ 11,330
K	% Avoided Utility Cost	16%

Indoor Water (Gallons)

Baseline Water Use	109,500
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 33,000
Commissioning Fees (Cx)	\$ 43,640
Estimated Additional Costs	\$ 156,600
Total	\$ 233,240
% of Total Gen Cont(G)	4%



Davis is a single story multiuse agricultural facility that hosts diverse uses from roller derby to flower shows. Davis was accepted on August 19, 2011. This is the fifth year of meter data for Davis Arena.

Energy consumption and cost for Davis is difficult to model due to the diverse use for this facility as noted above.

Davis shares a water meter with another building at the site. Metered water use for Davis is not available. The metered use provided is for two buildings.

Davis does not meet the requirements of the legislation.

(1) <http://www.usgbc.org/projects/davis-arena-renovation-and-expansion>

Fees and Costs Defined:

A	Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee: from the design contract (Fee does not include design amendments)
D	Commissioning Fees: contract amount with owner
E	Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs: from the designer's life cycle cost analysis
G	Total General Contract: from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost: meter data from the owner
J	Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Student Health Center Addition

Basic Project Data

Total Project Cost	\$ 6,758,383
Project Size (SF)	24,663
Cost/Square Foot	\$ 274
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 567,570
B Additional Design Fees	\$ 66,475
C Total Design Fee	\$ 634,045
% of Total Gen Cont(G)	1.10%
D Commissioning Fees (Cx)	\$ 106,438
% of Total Gen Cont(G)	1.77%
E Estimated Basic Costs	\$ 5,778,782
F Estimated Additional Costs	\$ 239,118
G Total General Contract	\$ 6,017,900
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 68,316
I Metered Utilities Cost	\$ 163,638
J Avoided Utility Cost	\$ (95,322)
K % Avoided Utility Cost	-140%

Indoor Water (Gallons)

Baseline Water Use	320,198
Metered Water Use	427,997
Avoided Water Use	(107,799)
% Avoided Water Use	-34%

Total Additional Fees & Costs

Additional Design Fees	\$ 66,475
Commissioning Fees (Cx)	\$ 106,438
Estimated Additional Costs	\$ 239,118
Total	\$ 412,031
% of Total Gen Cont(G)	7%



Student Health Center Addition is a two story addition to the existing student health center to accomodate a growing student population. The Center contains medical examination and treatment rooms as well as offices for staff. The Center was accepted on September 12, 2011. This is the fifth year of meter data for Student Health.

Modeled energy and water consumption is for the addition only. The metered energy and water metered consumption is for the addition and existing building combined. Therefore, the metered consumption for the addition and existing building is much greater than just the addition, which means the resulting energy savings is a negative number and percentage.

Student Health does not meet the requirements of the legislation since the metered energy use exceeded the modeled energy use.

(1) <http://www.usgbc.org/projects/ncsu-student-health-center-add-reno>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design ammendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Elizabeth City State University

Gilchrist Education and Psychology Building



Basic Project Data

Total Project Cost	\$ 16,637,177
Project Size (SF)	48,112
Cost/Square Foot	\$ 346
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	\$ 1,654,600
B Additional Design Fees	\$ 35,000
C Total Design Fee	\$ 2,186,050
% of Total Gen Cont(G)	0.24%
D Commissioning Fees (Cx)	\$ 57,000
% of Total Gen Cont(G)	0.40%
E Estimated Basic Costs	\$ 13,822,099
F Estimated Additional Costs	\$ 572,028
G Total General Contract	\$ 14,394,127
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 64,655
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	1,506,938
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 35,000
Commissioning Fees (Cx)	\$ 57,000
Estimated Additional Costs	\$ 572,028
Total	\$ 664,028
% of Total Gen Cont(G)	5%

Gilchrist is a three story university classroom and office facility. Gilchrist was accepted on February 1, 2012. This is the fourth year of meter data for Gilchrist.

Gilchrist has not met the requirements of the legislation due to a lack of meter data.

Note that Gilchrist did meet the requirements of the legislation last year 2014-2015.

(1) <http://www.usgbc.org/projects/education-and-psychology-building>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Department of Agriculture and Consumer Services

SENC Agriculture Events Center

Basic Project Data

Total Project Cost	\$ 4,447,345
Project Size (SF)	55,605
Cost/Square Foot	\$ 80
LEED Certification	None

Fees and Costs

A	Basic Design Fee	\$ 363,080
B	Additional Design Fees	\$ -
C	Total Design Fee	\$ 363,080
	% of Total Gen Cont(G)	0.00%
D	Commissioning Fees (Cx)	\$ 11,870
	% of Total Gen Cont(G)	0.29%
E	Estimated Basic Costs	\$ 3,919,435
F	Estimated Additional Costs	\$ 152,960
G	Total General Contract	\$ 4,072,395
	% of Total Gen Cont(G)	4%
H	Baseline Utilities Cost	\$ 42,886
I	Metered Utilities Cost	\$ 79,112
J	Avoided Utility Cost	\$ (36,226)
K	% Avoided Utility Cost	-84%

Indoor Water (Gallons)

Baseline Water Use	243,256
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 11,870
Estimated Additional Costs	\$ 152,960
Total	\$ 164,830
% of Total Gen Cont(G)	4%



The SENC Agriculture Events Center is a single story multipurpose agriculture and events building with office space and bathrooms. The Ag Center was accepted on April 12, 2012. This is the fourth year of meter data for SENC Ag Center.

The project as bid exceeded the construction budget. Value Engineering (VE) to remove the ducted HVAC system from the design brought the project within budget. The resulting heating and ventilation system was not modeled, but resulted in significantly less energy consumption than the previously designed and modeled system.

Meter data is not available for water use.

The Events Center has not met the requirements of the legislation since the metered energy use exceeded the modeled energy use.

Fees and Costs Defined:

A	Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee: from the design contract (Fee does not include design amendments)
D	Commissioning Fees: contract amount with owner
E	Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs: from the designer's life cycle cost analysis
G	Total General Contract: from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost: meter data from the owner
J	Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

EPIC



Basic Project Data	
Total Project Cost	\$ 67,918,534
Project Size (SF)	200,164
Cost/Square Foot	\$ 339
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 5,792,635
B Additional Design Fees	\$ 221,084
C Total Design Fee	\$ 6,013,719
% of Total Gen Cont(G)	0.36%
D Commissioning Fees (Cx)	\$ 404,815
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 51,725,930
F Estimated Additional Costs	\$ 9,774,070
G Total General Contract	\$ 61,500,000
% of Total Gen Cont(G)	16%
H Baseline Utilities Cost	\$ 284,103
I Metered Utilities Cost	\$ 433,640
J Avoided Utility Cost	\$ (149,537)
K % Avoided Utility Cost	-53%
Indoor Water (Gallons)	
Baseline Water Use	3,172,838
Metered Water Use	873,973
Avoided Water Use	2,298,865
% Avoided Water Use	72%
Total Additional Fees & Costs	
Additional Design Fees	\$ 221,084
Commissioning Fees (Cx)	\$ 404,815
Estimated Additional Costs	\$ 9,774,070
Total	\$ 10,399,969
% of Total Gen Cont(G)	17%

EPIC or Energy Production and Infrastructure Center is four stories high and includes an engineering teaching classrooms and research laboratories. EPIC was accepted on April 12, 2012. This is the fourth year of meter data for EPIC.

Estimated Basic Costs (E) by the designers of record was almost ten million dollars below the Total General Contract of \$61,500,000 resulting in a larger than normal premium for compliance with the legislation.

Metered utilities consumption was more than double the baseline modeled utilities consumption due to high plug and process loads.

LEED certification could not be verified through the USGBC website although design fees included LEED certification.

EPIC does not meet the requirements of the legislation since metered energy use exceeded modeled energy use.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Department of Military and Veteran's Affairs

Swannanoa Veterans Home

Basic Project Data

Total Project Cost	\$ 17,482,041
Project Size (SF)	108,770
Cost/Square Foot	\$ 161
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 1,250,000
B Additional Design Fees	None
C Total Design Fee	\$ 1,250,000
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 96,941
% of Total Gen Cont(G)	0.60%
E Estimated Basic Costs	\$ 15,834,228
F Estimated Additional Costs	\$ 300,872
G Total General Contract	\$ 16,135,100
% of Total Gen Cont(G)	2%
H Baseline Utilities Cost	\$ 213,106
I Metered Utilities Cost	\$ 174,267
J Avoided Utility Cost	\$ 38,839
K % Avoided Utility Cost	18%

Indoor Water (Gallons)

Baseline Water Use	4,378,540
Metered Water Use	4,190,290
Avoided Water Use	188,250
% Avoided Water Use	4%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 96,941
Estimated Additional Costs	\$ 300,872
Total	\$ 397,813
% of Total Gen Cont(G)	2%



The Swannanoa Veterans Home is a single story skilled nursing facility that houses 100 veterans. The Swannanoa Nursing Home was accepted on May 24, 2010. This is the fourth year of meter data for Swannanoa.

Metered energy consumption was higher than baseline utilities energy consumption, but the costs were lower indicating the utility rates used in the model did not agree with the metered utility rates. The resulting avoided utility cost is not correct due to the difference in the utility rates.

Metered water use was lower (15%) than the estimated baseline water use, but greatly exceeds the average usage for a residence hall of approximately 7,245 gallons/resident/year at 37,096 gallons/resident/year.

Further review of utility rates and utility consumption is required for a more accurate analysis.

Swannanoa Veterans Home does not meet the requirements of the legislation since metered energy use exceeds modeled energy use.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Pitt Community College

Russell Classroom Building



Basic Project Data

Total Project Cost	\$ 8,431,397
Project Size (SF)	50,434
Cost/Square Foot	\$ 167
LEED Certification	None

Fees and Costs

A	Basic Design Fee	\$ 943,138
B	Additional Design Fees	\$ 52,150
C	Total Design Fee	\$ 995,288
	% of Total Gen Cont(G)	0.71%
D	Commissioning Fees (Cx)	\$ 42,310
	% of Total Gen Cont(G)	0.57%
E	Estimated Basic Costs	\$ 7,243,287
F	Estimated Additional Costs	\$ 150,512
G	Total General Contract	\$ 7,393,799
	% of Total Gen Cont(G)	2%
H	Baseline Utilities Cost	\$ 91,928
I	Metered Utilities Cost	No data
J	Avoided Utility Cost	
K	% Avoided Utility Cost	
Indoor Water (Gallons)		
	Baseline Water Use	1,217,970
	Metered Water Use	No data
	Avoided Water Use	
	% Avoided Water Use	
Total Additional Fees & Costs		
	Additional Design Fees	\$ 52,150
	Commissioning Fees (Cx)	\$ 42,310
	Estimated Additional Costs	\$ 150,512.00
	Total	\$ 244,972
	% of Total Gen Cont(G)	3%

Russell Classroom Building is a two story classroom and office building. Russell was accepted on June 27, 2012. This is the fourth year of meter data for Russell.

Previous year's metered utilities consumption was incorrect due to the use of a utility meter that metered three buildings on campus including Russell.

Russell met the requirements of the legislation last year.

Russell has met the requirements of the legislation since meter data has not been received for this year.

Fees and Costs Defined:

A	Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee: from the design contract (Fee does not include design amendments)
D	Commissioning Fees: contract amount with owner
E	Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs: from the designer's life cycle cost analysis
G	Total General Contract: from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost: meter data from the owner
J	Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Bailey Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 18,624
J Avoided Utility Cost	\$ 40,984
K % Avoided Utility Cost	69%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	912,700
Avoided Water Use	(584,820)
% Avoided Water Use	-178%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Bailey Residence Hall is four stories and houses 86 students. Bailey renovation was part of a seven building project as shown above. Bailey was accepted on July 1, 2012. This is the fourth year of meter data for Bailey.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not accurate and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Bailey has met the requirements of the legislation for energy consumption.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Coit Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 14,952
J Avoided Utility Cost	\$ 44,656
K % Avoided Utility Cost	75%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	656,500
Avoided Water Use	(328,620)
% Avoided Water Use	-100%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Coit Residence Hall is four stories and houses 86 students. Coit renovation was part of a seven building project as shown above. Coit was accepted on July 1, 2012. This is the fourth year of meter data for Coit.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data. Coit's meter data is unrealistically low.

Coit has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Cotten Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 20,169
J Avoided Utility Cost	\$ 39,439
K % Avoided Utility Cost	66%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	978,800
Avoided Water Use	(650,920)
% Avoided Water Use	-199%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Cotten Residence Hall is four stories and houses 86 students. Cotten renovation was part of a seven building project as shown above. Cotten was accepted on July 1, 2012. This is the fourth year of meter data for Cotten.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Cotten has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Gray Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 19,063
J Avoided Utility Cost	\$ 40,545
K % Avoided Utility Cost	68%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	756,300
Avoided Water Use	(428,420)
% Avoided Water Use	-131%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Gray Residence Hall is four stories and houses 86 students. Gray was accepted on July 1, 2012. This is the fourth year of meter data for Gray.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Gray has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Hinshaw Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 23,084
J Avoided Utility Cost	\$ 36,524
K % Avoided Utility Cost	61%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	659,800
Avoided Water Use	(331,920)
% Avoided Water Use	-101%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Hinshaw Residence Hall is four stories and houses 86 students. Hinshaw was accepted on July 1, 2012. This is the fourth year of meter data for Hinshaw.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Hinshaw has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Jamison Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	30,735
Cost/Square Foot	\$ 223
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 18,248
J Avoided Utility Cost	\$ 41,360
K % Avoided Utility Cost	69%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	835,400
Avoided Water Use	(507,520)
% Avoided Water Use	-155%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Jamison Residence Hall is four stories and houses 86 students. Jamison was accepted on July 1, 2012. This is the fourth year of meter data for Jamison.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report. Metered utilities cost was low while metered utilities consumption was high. The data does not agree.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Jamison has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Shaw Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,849,514
Project Size (SF)	54,847
Cost/Square Foot	\$ 125
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 600,745
B Additional Design Fees	\$ 11,429
C Total Design Fee	\$ 612,174
% of Total Gen Cont(G)	0.18%
D Commissioning Fees (Cx)	\$ 40,879
% of Total Gen Cont(G)	0.66%
E Estimated Basic Costs	\$ 6,016,156
F Estimated Additional Costs	\$ 180,305
G Total General Contract	\$ 6,196,461
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 59,608
I Metered Utilities Cost	\$ 33,127
J Avoided Utility Cost	\$ 26,481
K % Avoided Utility Cost	44%

Indoor Water (Gallons)

Baseline Water Use	327,880
Metered Water Use	1,240,812
Avoided Water Use	(912,932)
% Avoided Water Use	-278%

Total Additional Fees & Costs

Additional Design Fees	\$ 11,429
Commissioning Fees (Cx)	\$ 40,879
Estimated Additional Costs	\$ 180,305
Total	\$ 232,613
% of Total Gen Cont(G)	4%



Shaw Residence Hall is four stories and houses 118 students along with living/learning classrooms. Shaw was accepted on July 1, 2012. This is the fourth year of meter data for Shaw.

Campus utilities are billed on a square foot basis instead of metering utilities used by the building. Therefore, metered utilities cost is not as accurate as could be and are low for this report.

Baseline water use was low for this type of facility while the metered water use is typical. The negative avoided water use and negative percent avoided water use indicates the estimated baseline water use was low for a residence hall. Typically water consumption averages around 7,245 gallons/student/year. Shaw was much higher than the remainder of the Quad.

The Quad Residence Hall renovation project includes six identical residence halls that should have similar meter data.

Shaw has not met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-quad-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Western Carolina University

Harrill Residence Hall Renovation

Basic Project Data

Total Project Cost	\$ 14,587,035
Project Size (SF)	71,505
Cost/Square Foot	\$ 204
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 998,800
B Additional Design Fees	None
C Total Design Fee	\$ 998,800
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 153,235
% of Total Gen Cont(G)	1.14%
E Estimated Basic Costs	\$ 11,750,000
F Estimated Additional Costs	\$ 1,685,000
G Total General Contract	\$ 13,435,000
% of Total Gen Cont(G)	13%
H Baseline Utilities Cost	\$ 114,129
I Metered Utilities Cost	Incomplete data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	2,675,470
Metered Water Use	1,419,051
Avoided Water Use	1,256,419
% Avoided Water Use	47%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 153,235
Estimated Additional Costs	\$ 1,685,000
Total	\$ 1,838,235
% of Total Gen Cont(G)	14%



Harrill Residence Hall is a ten story high-rise residence hall renovation that houses 350 students. Harrill was accepted on August 2, 2012. This is the fourth year of meter data for Harrill.

The modeled utility cost is less than the metered utility cost resulting in a smaller percentage of avoided utility savings.

Indoor water use for Harrill equates to 4,054 gal/student/year while typical residence hall use is 7,245 gal/student/year.

The Estimated Additional Costs (F) are high at 14% as a result a low Estimated Basic Cost (E) from the designers of record. Using the estimate increased investment cost presented in the LCCA of \$502,319 instead of \$1,685,000 resulted in total additional fees and costs of 5% instead of 14% and is typical of other buildings complying with the legislation.

Harrill has not met the requirements of the legislation since two months of meter data are missing. Harrill met the requirements last year.

(1) <http://www.usgbc.org/projects/harrill-hall-renovations>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Fayetteville State University

Renaissance Residence Hall

Basic Project Data

Total Project Cost	No contract
Project Size (SF)	85,000
Cost/Square Foot	No Data
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	No contract
B Additional Design Fees	No contract
C Total Design Fee	
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	No contract
% of Total Gen Cont(G)	
E Estimated Basic Costs	No contract
F Estimated Additional Costs	\$ 850,000
G Total General Contract	No contract
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 174,915
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	2,636,463
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	
Estimated Additional Costs	\$ 850,000
Total	\$ 850,000
% of Total Gen Cont(G)	No Data



Renaissance Residence Hall is a three story facility that houses 340 students. Renaissance was accepted on August 7, 2012. This is the fourth year of meter data for Renaissance.

Renaissance is a privately funded project on state land that is required to meet the program. Since the project is privately funded, SCO does not have data related to design and construction costs. Estimated additional costs were provided by the design team as part of the life cycle cost analysis.

Metered energy and water consumption data has not been received for this facility.

Renaissance has not met the requirements of the legislation since meter data has not been received.

(1) <http://www.usgbc.org/projects/renaissance-hall-student-housing-project>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Pembroke

The Health Sciences Building

Basic Project Data

Total Project Cost	\$ 16,886,020
Project Size (SF)	87,000
Cost/Square Foot	\$ 194
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 2,004,260
B Additional Design Fees	\$ 47,460
C Total Design Fee	\$ 2,051,720
% of Total Gen Cont(G)	0.32%
D Commissioning Fees (Cx)	\$ -
% of Total Gen Cont(G)	0.00%
E Estimated Basic Costs	\$ 14,419,316
F Estimated Additional Costs	\$ 414,984
G Total General Contract	\$ 14,834,300
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 98,379
I Metered Utilities Cost	\$ 131,774
J Avoided Utility Cost	\$ (33,395)
K % Avoided Utility Cost	-34%

Indoor Water (Gallons)

Baseline Water Use	2,606,625
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 47,460
Commissioning Fees (Cx)	\$ -
Estimated Additional Costs	\$ 414,984
Total	\$ 462,444
% of Total Gen Cont(G)	3%



The Health Sciences Building is a three story building that houses classrooms, teaching laboratories and offices. The building was accepted on August 7, 2012. This is the fourth year of meter data for Health Sciences.

Metered energy usage for the first year of occupancy was 6% higher than the modeled building and did not meet the program requirements. Metered energy cost was 23% higher than modeled. The disparity between energy costs and use indicates the energy rate used in the model was not the same energy rate billed to the building. Indoor water consumption was 67% less than modeled and much lower than expected for a classroom and office building.

The third year of meter data follows the trend set by the first year of data noted above.

Health Sciences has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

The water meter is broken and data is not available.

(1) <http://www.usgbc.org/projects/uncp-nursing-and-health-building>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Asheville

Overlook Residence Hall



Basic Project Data

Total Project Cost	\$ 18,237,600
Project Size (SF)	91,370
Cost/Square Foot	\$ 200
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 1,685,000
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,685,000
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 85,000
% of Total Gen Cont(G)	0.52%
E Estimated Basic Costs	\$ 14,927,082
F Estimated Additional Costs	\$ 1,540,518
G Total General Contract	\$ 16,467,600
% of Total Gen Cont(G)	9%
H Baseline Utilities Cost	\$ 89,281
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	2,888,310
Metered Water Use	4,225,452
Avoided Water Use	(1,337,142)
% Avoided Water Use	-46%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 85,000
Estimated Additional Costs	\$ 1,540,518
Total	\$ 1,625,518
% of Total Gen Cont(G)	10%

Overlook Residence Hall is a four story facility that houses 300 students. Overlook was accepted on August 8, 2012. This is the fourth year of meter data for Overlook.

Meter data was received for water use, but not for utility cost or use due to a lack of utility meters. Water consumption was much higher for Overlook than for other residence halls studied.

Overlook was not designed for LEED requirements.

Estimated Additional Costs (F) are high resulting in a high estimate for complying with the legislation.

Overlook has not met the requirements of the legislation due to a lack of building meter data.

Metered water use exceeded baseline water use and exceeded typical residence hall use on a per student basis.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Elizabeth City State University

Viking Tower Residence Hall



Basic Project Data	
Total Project Cost	\$ 13,759,446
Project Size (SF)	53,896
Cost/Square Foot	\$ 255
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 1,159,950
B Additional Design Fees	\$ 40,000
C Total Design Fee	\$ 1,199,950
% of Total Gen Cont(G)	0.32%
D Commissioning Fees (Cx)	\$ 85,000
% of Total Gen Cont(G)	0.68%
E Estimated Basic Costs	\$ 12,222,788
F Estimated Additional Costs	\$ 251,708
G Total General Contract	\$ 12,474,496
% of Total Gen Cont(G)	2%
H Baseline Utilities Cost	\$ 217,417
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	1,193,460
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ 40,000
Commissioning Fees (Cx)	\$ 85,000
Estimated Additional Costs	\$ 251,708
Total	\$ 376,708
% of Total Gen Cont(G)	3%

Viking Tower Residence Hall is a three story facility that houses 210 students. Viking Tower was accepted on August 17, 2012. This is the fourth year of meter data for Viking Tower.

The baseline utilities consumption and cost for Viking were higher than for similar facilities.

Viking Tower has not met the requirements of the legislation due to a lack of meter data.

Viking Tower met the requirements for energy consumption last year.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Wilmington

Teaching Laboratory Building



Basic Project Data

Total Project Cost	\$ 18,260,650
Project Size (SF)	85,000
Cost/Square Foot	\$ 215
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 2,458,630
B Additional Design Fees	\$ 156,820
C Total Design Fee	\$ 2,615,450
% of Total Gen Cont(G)	1.00%
D Commissioning Fees (Cx)	\$ -
% of Total Gen Cont(G)	0.00%
E Estimated Basic Costs	\$ 15,440,699
F Estimated Additional Costs	\$ 204,501
G Total General Contract	\$ 15,645,200
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 142,633
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Savings	

Indoor Water (Gallons)

Baseline Water Use	751,030
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 156,820
Commissioning Fees (Cx)	
Estimated Additional Costs	\$ 204,501
Total	\$ 361,321
% of Total Gen Cont(G)	2%

Teaching Laboratory Building is a three story building that houses classrooms, teaching laboratories and offices. Teaching Lab was accepted on August 24, 2012. This is the fourth year of meter data for Teaching Lab.

Meter data has not been received.

Teaching Lab has not met the requirements of the legislation due to a lack of meter data.

(1) <http://www.usgbc.org/projects/unc-wilmington-teaching-labs>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Asheville

Rhoades Hall Renovation

Basic Project Data

Total Project Cost	\$ 6,855,465
Project Size (SF)	40,434
Cost/Square Foot	\$ 170
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 782,665
B Additional Design Fees	\$ 76,500
C Total Design Fee	\$ 859,165
% of Total Gen Cont(G)	1.28%
D Commissioning Fees (Cx)	\$ -
% of Total Gen Cont(G)	0.00%
E Estimated Basic Costs	\$ 5,834,600
F Estimated Additional Costs	\$ 161,700
G Total General Contract	\$ 5,996,300
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 98,370
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Savings	

Indoor Water (Gallons)

Baseline Water Use	957,500
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 76,500
Commissioning Fees (Cx)	\$ -
Estimated Additional Costs	\$ 161,700
Total	\$ 238,200
% of Total Gen Cont(G)	4%



Rhoades Hall Renovation is a three and four story building that houses classrooms, laboratories and offices. Rhoades was accepted on September 10, 2012. This is the third year of meter data for Rhoades.

Water meter data has been provided and is included.

Utility meter data has not been received for Rhoades.

Rhoades has not met the requirements of the legislation due to a lack of utility meter data.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

East Carolina University

School of Dental Medicine / Ledyard E. Ross Hall

Basic Project Data

Total Project Cost	\$ 38,917,314
Project Size (SF)	157,410
Cost/Square Foot	\$ 247
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 5,294,860
B Additional Design Fees	\$ 100,000
C Total Design Fee	\$ 5,394,860
% of Total Gen Cont(G)	0.30%
D Commissioning Fees (Cx)	\$ 346,397
% of Total Gen Cont(G)	1.04%
E Estimated Basic Costs	\$ 32,922,547
F Estimated Additional Costs	\$ 253,510
G Total General Contract	\$ 33,176,057
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 420,065
I Metered Utilities Cost	\$ 203,551
J Avoided Water Use	\$ 216,514
K % Avoided Water Use	52%

Indoor Water (Gallons)

Baseline Water Use	1,373,584
Metered Water Use	No data
Water Savings	
Percent Water Savings	

Total Additional Fees & Costs

Additional Design Fees	\$ 100,000
Commissioning Fees (Cx)	\$ 346,397
Estimated Additional Costs	\$ 253,510
Total	\$ 699,907
% of Total Gen Cont(G)	2%



Ross Hall is a four story dental teaching building containing classrooms, laboratories, dental clinics and offices. There is a partial mechanical basement and full mechanical penthouse in addition to the four occupied floors. Ross was accepted on September 14, 2012. This is the third year of meter data for Ross Hall.

Ross Hall has not been submitted for LEED certification.

The fourth floor shell space has been completed which will increase energy and water use for the facility above the modeled energy and water use.

Energy data has been received, but water data has not been received for Ross.

Ross has met the requirements of the legislation for energy consumption. Energy cost is incomplete due to a lack of meter data for chilled water cost.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Gaston College

Lena Sue Beam Renovation



Basic Project Data	
Total Project Cost	\$ 5,232,784
Project Size (SF)	31,418
Cost/Square Foot	\$ 167
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 474,000
B Additional Design Fees	\$ -
C Total Design Fee	\$ 474,000
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 56,984
% of Total Gen Cont(G)	1.21%
E Estimated Basic Costs	\$ 4,657,494
F Estimated Additional Costs	\$ 44,306
G Total General Contract	\$ 4,701,800
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 36,406
I Metered Utilities Cost	Incomplete data
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	689,715
Metered Water Use	130,253
Avoided Water Use	559,462
% Avoided Water Use	81%
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 56,984
Estimated Additional Costs	\$ 44,306
Total	\$ 101,290
% of Total Gen Cont(G)	2%

Lena Sue Beam renovation is a two story classroom and office building. Lena Sue Beam was accepted on October 3, 2012. This is the third year of meter data for Lena Sue Beam.

Energy meter data is incomplete or does not include chilled water consumption.

Lena Sue Beam has not met the requirements of the legislation since meter data is incomplete.

Indoor water consumption does meet the requirements of the legislation.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

James B. Hunt, Jr. Library



Basic Project Data

Total Project Cost	\$ 91,740,961
Project Size (SF)	253,028
Cost/Square Foot	\$ 363
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 9,629,956
B Additional Design Fees	\$ 200,000
C Total Design Fee	\$ 9,829,956
% of Total Gen Cont(G)	2.03%
D Commissioning Fees (Cx)	\$ 605,005
% of Total Gen Cont(G)	0.74%
E Estimated Basic Costs	\$ 80,844,228
F Estimated Additional Costs	\$ 461,772
G Total General Contract	\$ 81,306,000
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 268,448
I Metered Utilities Cost	\$ 590,039
J Avoided Utility Cost	\$ (321,591)
K % Avoided Utility Cost	-120%

Indoor Water (Gallons)

Baseline Water Use	4,536,750
Metered Water Use	1,765,280
Avoided Water Use	2,771,470
% Avoided Water Use	61%

Total Additional Fees & Costs

Additional Design Fees	\$ 200,000
Commissioning Fees (Cx)	\$ 605,005
Estimated Additional Costs	\$ 461,772
Total	\$ 1,266,777
% of Total Gen Cont(G)	2%

Hunt Library is the largest building completed under the program at 253,028 square feet. Construction costs for the project have been difficult to accurately determine due to the number of bid packages and the scope of the project which not only included the library building itself, but parking structure, site utilities and other features. Hunt was accepted on October 18, 2012. This is the third year of meter data for Hunt.

Baseline water consumption estimated during the design process is noted as very high for a library building with water use limited to waterclosets and lavatories. Plug and process loads were not included in the energy model or baseline utilities cost while plug and process loads are currently carried in the metered utility cost. The comparison is not accurate with this data.

Hunt has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/james-b-hunt-jr-library>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Judy W. Rose Football Center

Basic Project Data

Total Project Cost	\$ 16,534,972
Project Size (SF)	43,290
Cost/Square Foot	\$ 382
LEED Certification	Certified (1)

Fees and Costs

A Basic Design Fee	\$ 3,403,472
B Additional Design Fees	\$ 45,000
C Total Design Fee	\$ 3,448,472
% of Total Gen Cont(G)	1%
D Commissioning Fees (Cx)	\$ 99,500
% of Total Gen Cont(G)	0.77%
E Estimated Basic Costs	\$ 12,521,456
F Estimated Additional Costs	\$ 465,544
G Total General Contract	\$ 12,987,000
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 65,175
I Metered Utilities Cost	\$ 132,231
J Avoided Utility Cost	\$ (67,056)
K % Avoided Utility Cost	-103%

Indoor Water (Gallons)

Baseline Water Use	1,349,491
Metered Water Use	2,412,382
Avoided Water Use	(1,062,891)
% Avoided Water Use	-79%

Total Additional Fees & Costs

Additional Design Fees	\$ 45,000
Commissioning Fees (Cx)	\$ 99,500
Estimated Additional Costs	\$ 465,544
Total	\$ 610,044
% of Total Gen Cont(G)	5%



Rose Football Center is a two story football training center, locker room and meeting space. Rose was accepted on October 31, 2012. This is the third year of meter data for Rose Football Center.

The design fee and construction cost are for the entire football complex, not just the Rose Football Center. The cost per square foot is grossly inflated since the football center was not designed and bid separately. The football center has been estimated at \$300/GSF and used to calculate the Total General Contract (G).

Metered utility consumption was more than double the baseline utilities cost. The metered utility consumption includes the athletic field lights.

Rose Football Center has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/football-complex-fieldhouse>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Department of Military & Veteran's Affairs

Kinston Veterans Home

Basic Project Data

Total Project Cost	\$ 14,088,404
Project Size (SF)	108,770
Cost/Square Foot	\$ 130
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 1,077,600
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,077,600
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 107,804
% of Total Gen Cont(G)	0.84%
E Estimated Basic Costs	\$ 12,602,128
F Estimated Additional Costs	\$ 300,872
G Total General Contract	\$ 12,903,000
% of Total Gen Cont(G)	2%
H Baseline Utilities Cost	\$ 213,106
I Metered Utilities Cost	\$ 200,385
J Avoided Utility Cost	\$ 12,721
K % Avoided Utility Cost	6%

Indoor Water (Gallons)

Baseline Water Use	4,378,540
Metered Water Use	6,710,400
Avoided Water Use	(2,331,860)
% Avoided Water Use	-53%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 107,804
Estimated Additional Costs	\$ 300,872
Total	\$ 408,676
% of Total Gen Cont(G)	3%



The Kinston Nursing Home houses 100 service member veterans in a skilled nursing facility. The Kinston Nursing Home was accepted on October 31, 2012. This is the third year of meter data for Kinston.

The Kinston and Swannanoa Nursing homes are identical and should perform similarly and have similar utility consumption and cost.

Construction costs for the Kinston VA home were less than the identical Swannanoa VA home due to site costs of the mountains versus the coastal plains.

Kinston has not met the requirements of the legislation since metered utility use exceeded modeled utility use.

Metered water use has more than doubled from last year and should be investigated.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Randolph Community College

Continuing Education and Industrial Arts Center

Basic Project Data

Total Project Cost	\$ 6,774,300
Project Size (SF)	43,967
Cost/Square Foot	\$ 154
LEED Certification	Gold (1)

Fees and Costs

A Basic Design Fee	\$ 363,200
B Additional Design Fees	\$ -
C Total Design Fee	\$ 363,200
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 49,800
% of Total Gen Cont(G)	0.78%
E Estimated Basic Costs	\$ 6,060,565
F Estimated Additional Costs	\$ 300,735
G Total General Contract	\$ 6,361,300
% of Total Gen Cont(G)	5%
H Baseline Utilities Cost	\$ 67,485
I Metered Utilities Cost	\$ 78,538
J Avoided Utility Cost	\$ (11,053)
K % Avoided Utility Cost	-16%

Indoor Water (Gallons)

Baseline Water Use	544,858
Metered Water Use	27,302
Avoided Water Use	517,556
% Avoided Water Use	95%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 49,800
Estimated Additional Costs	\$ 300,735
Total	\$ 350,535
% of Total Gen Cont(G)	6%



Klaussner Building Renovation involved converting a former furniture factory into an office, classroom and technology teaching building. Klaussner was accepted on November 27, 2012. This is the third year of meter data for Klaussner.

Metered utility consumption and cost exceeded the baseline utility consumption and cost and did not meet the requirements of the legislation. The modeled baseline utility consumption was low and should be reconciled with the building as constructed and used.

Metered water consumption was much less than the baseline water consumption estimate. Estimating water consumption has proved to be difficult due to varying use and occupancy in the building.

Klaussner has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/continuing-ed-industrial-center-renov>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Appalachian State University

Plemmons Student Union Addition



Basic Project Data	
Total Project Cost	\$ 16,289,276
Project Size (SF)	50,560
Cost/Square Foot	\$ 322
LEED Certification	Gold (1)
Fees and Costs	
A Basic Design Fee	\$ 894,572
B Additional Design Fees	\$ 90,950
C Total Design Fee	\$ 985,522
% of Total Gen Cont(G)	0.60%
D Commissioning Fees (Cx)	\$ 71,248
% of Total Gen Cont(G)	0.47%
E Estimated Basic Costs	\$ 14,629,006
F Estimated Additional Costs	\$ 603,500
G Total General Contract	\$ 15,232,506
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 53,367
I Metered Utilities Cost	\$ 240,223
J Avoided Utility Cost	\$ (186,856)
K % Avoided Utility Cost	-350%
Indoor Water (Gallons)	
Baseline Water Use	1,220,706
Metered Water Use	3,402,873
Avoided Water Use	(2,182,167)
% Avoided Water Use	-179%
Total Additional Fees & Costs	
Additional Design Fees	\$ 90,950
Commissioning Fees (Cx)	\$ 71,248
Estimated Additional Costs	\$ 603,500
Total	\$ 765,698
% of Total Gen Cont(G)	5%

Plemmons Student Union Addition is a four story addition to the existing student center. The Addition was accepted on December 18, 2012. This is the third year of meter data for Plemmons.

Meter data received for Plemmons was for the entire building instead of for the addition. Due to the size of Plemmons Student Union and the high plug and process loads, the meter data is not applicable for the addition. The meter data presented indicates a large difference between the model data for the addition and the meter data for the entire building.

Plemmons has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/asu-plemmons-addition>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Appalachian State University

Summit Residence Hall and Appalachian Hall

Basic Project Data

Total Project Cost	\$ 43,619,657
Project Size (SF)	128,585
Cost/Square Foot	\$ 339
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	\$ 2,569,633
B Additional Design Fees	\$ 94,925
C Total Design Fee	\$ 2,664,558
% of Total Gen Cont(G)	0.23%
D Commissioning Fees (Cx)	\$ 263,882
% of Total Gen Cont(G)	0.65%
E Estimated Basic Costs	\$ 39,309,739
F Estimated Additional Costs	\$ 1,381,478
G Total General Contract	\$ 40,691,217
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 153,208
I Metered Utilities Cost	\$ 208,325
J Avoided Utility Cost	\$ (55,117)
K % Avoided Utility Cost	-36%

Indoor Water (Gallons)

Baseline Water Use	3,388,865
Metered Water Use	2,363,896
Avoided Water Use	1,024,969
% Avoided Water Use	30%

Total Additional Fees & Costs

Additional Design Fees	\$ 94,925
Commissioning Fees (Cx)	\$ 263,882
Estimated Additional Costs	\$ 1,381,478
Total	\$ 1,740,285
% of Total Gen Cont(G)	4%



Summit Residence Hall is an 11 floor residence hall and the attached Appalachian Hall is a three story office and classroom facility / living learning center. Summit was accepted on December 18, 2012. This is the third year of meter data for Summit.

The baseline or modeled utilities cost are low when compared to similar buildings while the metered utilities cost is typical for this type of facility. The negative avoided utility cost is due to the low baseline cost, not due to an inefficient building.

The metered water use shows savings typical for low flow fixtures and typical residence hall use patterns.

Summitt has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/asu-llc>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design ammendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Wilmington

MARBIONC



Basic Project Data		
Total Project Cost	\$	27,470,401
Project Size (SF)		68,000
Cost/Square Foot	\$	404
LEED Certification		Certified (1)
Fees and Costs		
A Basic Design Fee	\$	2,694,677
B Additional Design Fees	\$	110,280
C Total Design Fee	\$	2,804,957
% of Total Gen Cont(G)		0.45%
D Commissioning Fees (Cx)	\$	294,243
% of Total Gen Cont(G)		1.21%
E Estimated Basic Costs	\$	19,975,000
F Estimated Additional Costs	\$	4,396,201
G Total General Contract	\$	24,371,201
% of Total Gen Cont(G)		18%
H Baseline Utilities Cost	\$	425,995
I Metered Utilities Cost		No data
J Avoided Utility Cost		
K % Avoided Utility Cost		
Indoor Water (Gallons)		
Baseline Water Use		5,139,169
Metered Water Use		No data
Avoided Water Use		
% Avoided Water Use		
Total Additional Fees & Costs		
Additional Design Fees	\$	110,280
Commissioning Fees (Cx)	\$	294,243
Estimated Additional Costs	\$	4,396,201
Total	\$	4,800,724
% of Total Gen Cont(G)		20%

MARBIONC is a two story marine research laboratory building that also contains offices. This type of building is energy intensive with high usage and bills to match. MARBIONC was accepted on January 29, 2013. This is the third year of meter data for MARBIONC.

Baseline indoor water consumption at 5,139,169 gallons/year was very high for any type of building and the highest usage/square foot estimated for any state building. There is not a water meter for the facility.

The total additional fees and costs at 20% are not realistic due to the simplified estimate for basic costs used by the designer at 15% of the cost of the proposed building.

Meter data has not been received for MARBIONC.

MARBIONC has not met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/marine-biotechnology-research-facility>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC Department of Administration

NC State Bar Headquarters

Basic Project Data

Total Project Cost	\$ 14,143,900
Project Size (SF)	54,565
Cost/Square Foot	\$ 259
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 1,119,000
B Additional Design Fees	\$ 6,000
C Total Design Fee	\$ 1,125,000
% of Total Gen Cont(G)	0%
D Commissioning Fees (Cx)	\$ 56,200
% of Total Gen Cont(G)	0.43%
E Estimated Basic Costs	\$ 12,687,413
F Estimated Additional Costs	\$ 275,287
G Total General Contract	\$ 12,962,700
% of Total Gen Cont(G)	2%
H Baseline Utilities Cost	\$ 45,238
I Metered Utilities Cost	\$ 83,761
J Avoided Utility Cost	\$ (38,523)
K % Avoided Utility Cost	-85%

Indoor Water (Gallons)

Baseline Water Use	175,310
Metered Water Use	229,636
Avoided Water Use	(54,326)
% Avoided Water Use	-31%

Total Additional Fees & Costs

Additional Design Fees	\$ 6,000
Commissioning Fees (Cx)	\$ 56,200
Estimated Additional Costs	\$ 275,287
Total	\$ 337,487
% of Total Gen Cont(G)	3%



The NC State Bar Headquarters is a four story office building that also houses mock courtrooms and support spaces. This privately owned building is required to comply with the energy legislation since it was built on state owned land. The NC State Bar Headquarters was accepted on April 25, 2013. This is the third year of meter data for the NC State Bar.

The modeld baseline utilities consumption and cost for this type of building was very low. The metered utilities consumption and cost is typical for this type of building. The building is performing as expected for similar buildings.

Baseline and metered water use was essentially the same. The water savings requirement of 20% has not been met.

State Bar has not met the requirements of the legislation since metered energy use has exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/nc-state-bar>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design ammendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Fayetteville State University

Science and Technology Building



Basic Project Data

Total Project Cost	\$ 18,894,214
Project Size (SF)	65,861
Cost/Square Foot	\$ 287
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 1,441,000
B Additional Design Fees	\$ 135,000
C Total Design Fee	\$ 1,576,000
% of Total Gen Cont(G)	0.79%
D Commissioning Fees (Cx)	\$ 290,182
% of Total Gen Cont(G)	1.70%
E Estimated Basic Costs	\$ 16,327,000
F Estimated Additional Costs	\$ 701,032
G Total General Contract	\$ 17,028,032
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 151,889
I Metered Utilities Cost	No Data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	2,163,492
Metered Water Use	No Data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 135,000
Commissioning Fees (Cx)	\$ 290,182
Estimated Additional Costs	\$ 701,032
Total	\$ 1,126,214
% of Total Gen Cont(G)	7%

The Science and Technology Building is a four story building with two wings that house research and teaching laboratories in one wing and office and classroom space in the other wing with a connector that contains meeting spaces and a coffee shop. The Science and Technology Building was accepted on May 21, 2013. This is the third year of meter data for the Science and Technology Building.

Meter data has not been received.

The Science and Technology Building has not met the requirements of the legislation due to a lack of meter data.

(1) <http://www.usgbc.org/projects/fayetteville-state-u-lab>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Wilmington

Student Recreation Facility Addition

Basic Project Data

Total Project Cost	\$ 24,114,338
Project Size (SF)	93,917
Cost/Square Foot	\$ 257
LEED Certification	Certified (1)

Fees and Costs

A Basic Design Fee	\$ 2,295,110
B Additional Design Fees	\$ 215,000
C Total Design Fee	\$ 2,510,110
% of Total Gen Cont(G)	1.00%
D Commissioning Fees (Cx)	\$ 126,000
% of Total Gen Cont(G)	0.59%
E Estimated Basic Costs	\$ 20,845,432
F Estimated Additional Costs	\$ 632,796
G Total General Contract	\$ 21,478,228
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 351,452
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	810,220
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ 215,000
Commissioning Fees (Cx)	\$ 126,000
Estimated Additional Costs	\$ 632,796
Total	\$ 973,796
% of Total Gen Cont(G)	5%



Student Recreation Facility Addition doubles the size of the existing student recreation facility with a two story addition. The Addition was accepted on May 22, 2013. This is the third year of meter data for this building.

Meter data has not been received for MARBIONC.

MARBIONC has not met the requirements of the legislation due to a lack of meter data.

MARBIONC did not meet the requirements of the legislation last year since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/unc-wilmington-student-recreation-center>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Winston-Salem State University

Reaves Student Activities Center



Basic Project Data	
Total Project Cost	\$ 28,088,950
Project Size (SF)	91,513
Cost/Square Foot	\$ 307
LEED Certification	Gold (1)
Fees and Costs	
A Basic Design Fee	\$ 2,230,879
B Additional Design Fees	\$ 177,240
C Total Design Fee	\$ 2,408,119
% of Total Gen Cont(G)	0.70%
D Commissioning Fees (Cx)	\$ 287,625
% of Total Gen Cont(G)	1.13%
E Estimated Basic Costs	\$ 25,315,267
F Estimated Additional Costs	\$ 77,939
G Total General Contract	\$ 25,393,206
% of Total Gen Cont(G)	0%
H Baseline Utilities Cost	\$ 105,529
I Metered Utilities Cost	\$ 191,607
J Avoided Utility Cost	\$ (86,078)
K % Avoided Utility Cost	-82%
Indoor Water (Gallons)	
Baseline Water Use	1,434,603
Metered Water Use	597,136
Avoided Water Use	837,467
% Avoided Water Use	58%
Total Additional Fees & Costs	
Additional Design Fees	\$ 177,240
Commissioning Fees (Cx)	\$ 287,625
Estimated Additional Costs	\$ 77,939
Total	\$ 542,804
% of Total Gen Cont(G)	2%

Reaves Student Activities Center is a three student dining, recreation and multiuse building. Reaves was accepted on June 24, 2013. This is the third year of meter data for Reaves.

Thermal utilities are metered based on the size or square footage of the building, not on consumption. Any efficiencies in utility consumption by this building are average with the other campus facilities served by campus steam and/or campus chilled water.

Reaves has not met the requirements of the legislation since metered energy use exceeded modeled energy use.

(1) <http://www.usgbc.org/projects/wssu-student-activities-center>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Haywood Community College

Creative Arts Building



Basic Project Data

Total Project Cost	\$ 9,316,286
Project Size (SF)	40,722
Cost/Square Foot	\$ 229
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	\$ 801,000
B Additional Design Fees	\$ 50,000
C Total Design Fee	\$ 851,000
% of Total Gen Cont(G)	0.60%
D Commissioning Fees (Cx)	\$ 80,000
% of Total Gen Cont(G)	0.95%
E Estimated Basic Costs	\$ 6,402,774
F Estimated Additional Costs	\$ 1,982,512
G Total General Contract	\$ 8,385,286
% of Total Gen Cont(G)	24%
H Baseline Utilities Cost	\$ 65,069
I Metered Utilities Cost	\$ 22,920
J Avoided Utility Cost	\$ 42,149
K % Avoided Utility Cost	65%

Indoor Water (Gallons)

Baseline Water Use	977,508
Metered Water Use	154,338
Avoided Water Use	823,170
% Avoided Water Use	84%

Total Additional Fees & Costs

Additional Design Fees	\$ 50,000
Commissioning Fees (Cx)	\$ 80,000
Estimated Additional Costs	\$ 1,982,512
Total	\$ 2,112,512
% of Total Gen Cont(G)	25%

The Creative Arts Building is a multilevel and multistory building that houses art studios, offices and classrooms. The building is classified as a three story building. The Creative Arts Building was accepted on June 30, 2013. This is the third year of meter data for the Creative Arts Building.

Innovative mechanical and electrical systems include a solar powered water chiller for air conditioning, under slab heating, photovoltaics for electricity and storm water harvesting for irrigation.

Creative Arts Building has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/haywood-cc-creative-arts-building>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Belk Residence Hall



Basic Project Data	
Total Project Cost	\$ 32,381,074
Project Size (SF)	164,377
Cost/Square Foot	\$ 197
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 2,041,790
B Additional Design Fees	\$ 126,000
C Total Design Fee	\$ 2,167,790
% of Total Gen Cont(G)	0.42%
D Commissioning Fees (Cx)	\$ 186,000
% of Total Gen Cont(G)	0.62%
E Estimated Basic Costs	\$ 30,027,284
F Estimated Additional Costs	\$ -
G Total General Contract	\$ 30,027,284
% of Total Gen Cont(G)	0%
H Baseline Utilities Cost	\$ 149,183
I Metered Utilities Cost	\$ 132,905
J Avoided Utility Cost	\$ 16,278
K % Avoided Utility Cost	11%
Indoor Water (Gallons)	
Baseline Water Use	2,719,308
Metered Water Use	5,659,474
Avoided Water Use	(2,940,166)
% Avoided Water Use	-108%
Total Additional Fees & Costs	
Additional Design Fees	\$ 126,000
Commissioning Fees (Cx)	\$ 186,000
Estimated Additional Costs	\$ -
Total	\$ 312,000
% of Total Gen Cont(G)	1%

Belk Residence Hall is a five story residence hall housing 400 students. Belk was accepted on July 9, 2013. This is the third year of meter data for Belk Residence Hall.

The baseline model and the metered utilities consumption are typical for this type of building.

Belk did not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Cherry Building Renovation



Basic Project Data

Total Project Cost	\$ 2,962,771
Project Size (SF)	22,482
Cost/Square Foot	\$ 132
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 292,501
B Additional Design Fees	\$ -
C Total Design Fee	\$ 292,501
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ -
% of Total Gen Cont(G)	0.00%
E Estimated Basic Costs	\$ 2,645,494
F Estimated Additional Costs	\$ 24,776
G Total General Contract	\$ 2,670,270
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 27,666
I Metered Utilities Cost	\$ 32,613
J Avoided Utility Cost	\$ (4,947)
K % Avoided Utility Cost	-18%

Indoor Water (Gallons)

Baseline Water Use	166,500
Metered Water Use	100,330
Avoided Water Use	66,170
% Avoided Water Use	40%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ -
Estimated Additional Costs	\$ 24,776
Total	\$ 24,776
% of Total Gen Cont(G)	1%

Cherry Building is a two story renovation that houses an early college high school program. Cherry was accepted on July 15, 2013. This is the third year of meter data for Cherry.

Cherry is unusual because there were no additional design fees for compliance with the energy legislation. The owner and designer also did not require third party commissioning.

Cherry did not meet the requirements of the legislation for energy savings since metered utility use exceeded modeled utility use.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Hunt Residence Hall



Basic Project Data	
Total Project Cost	\$ 24,655,367
Project Size (SF)	144,175
Cost/Square Foot	\$ 171
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 2,078,598
B Additional Design Fees	\$ -
C Total Design Fee	\$ 2,078,598
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 297,680
% of Total Gen Cont(G)	1.21%
E Estimated Basic Costs	\$ 22,816,693
F Estimated Additional Costs	\$ 1,838,674
G Total General Contract	\$ 24,655,367
% of Total Gen Cont(G)	7%
H Baseline Utilities Cost	\$ 141,674
I Metered Utilities Cost	\$ 95,607
J Avoided Utility Cost	\$ 46,067
K % Avoided Utility Cost	33%
Indoor Water (Gallons)	
Baseline Water Use	1,100,206
Metered Water Use	2,661,077
Avoided Water Use	(1,560,871)
% Avoided Water Use	-142%
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 297,680
Estimated Additional Costs	\$ 1,838,674
Total	\$ 2,136,354
% of Total Gen Cont(G)	9%

Hunt Residence Hall is a five story residence hall that houses 436 students. Hunt was accepted on July 29, 2013. This is the third year of meter data for Hunt Residence Hall.

No additional design fee was noted for compliance with the legislation.

Metered water use was over two times baseline water use. The estimated baseline water use was low for a residence hall while the metered water use was typical for a university residence hall on a per student basis.

Hunt has met the requirements of the legislation for utilities use.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Lakeview Hall - Wolf Ridge at Centennial Building 6

Basic Project Data

Total Project Cost	\$ 15,250,636
Project Size (SF)	67,202
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)

Fees and Costs


A Basic Design Fee	\$ 995,827
B Additional Design Fees	\$ -
C Total Design Fee	\$ 995,827
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 47,050
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 11,410,140
F Estimated Additional Costs	\$ 2,797,619
G Total General Contract	\$ 14,207,759
% of Total Gen Cont(G)	20%
H Baseline Utilities Cost	\$ 76,622
I Metered Utilities Cost	\$ 107,302
J Avoided Utility Cost	\$ (30,680)
K % Avoided Utility Cost	-40%

Indoor Water (Gallons)

Baseline Water Use	1,630,661
Metered Water Use	517,616
Avoided Water Use	1,113,045
% Avoided Water Use	68%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 47,050
Estimated Additional Costs	\$ 2,797,619
Total	\$ 2,844,670
% of Total Gen Cont(G)	20%

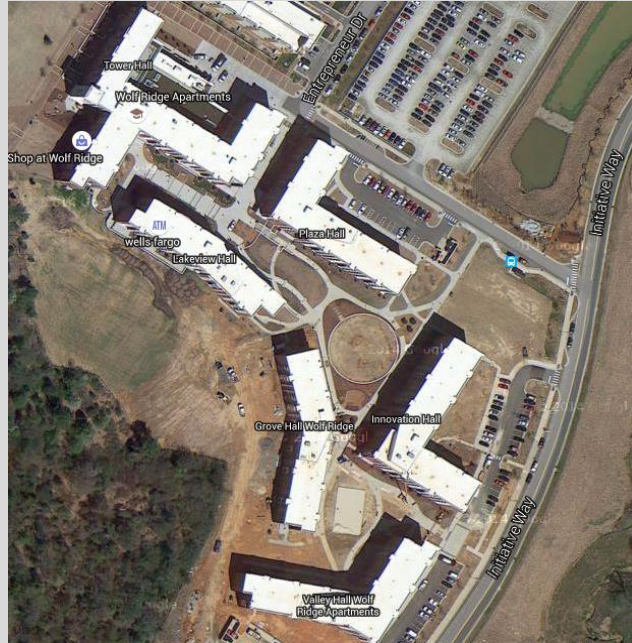

Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Lakeview Hall is six stories and houses 151 students. Lakeview was accepted on August 1, 2013. This is the third year of meter data for Lakeview.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Lakeview presented here comes with a 20 percent premium for compliance with the legislation.

Estimated baseline water use was high for a residence hall and the metered water use is lower than typically seen for a residence hall.

Lakeview does not meet the requirements of the legislation since metered energy use exceeds modeled energy use.

(1) <http://www.usgbc.org/projects/ncsu-ccsh-building-6>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Tower Hall - Wolf Ridge at Centennial Building 1

Basic Project Data

Total Project Cost	\$ 35,113,293
Project Size (SF)	154,726
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 2,292,794
B Additional Design Fees	\$ -
C Total Design Fee	\$ 2,292,794
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 108,329
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 26,270,928
F Estimated Additional Costs	\$ 6,441,243
G Total General Contract	\$ 32,712,171
% of Total Gen Cont(G)	20%
H Baseline Utilities Cost	\$ 220,350
I Metered Utilities Cost	\$ 276,375
J Avoided Utility Cost	\$ (56,025)
K % Avoided Utility Cost	-25%

Indoor Water (Gallons)

Baseline Water Use	5,618,485
Metered Water Use	2,116,840
Avoided Water Use	3,501,645
% Avoided Water Use	62%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 108,329
Estimated Additional Costs	\$ 6,441,243
Total	\$ 6,549,572
% of Total Gen Cont(G)	20%



Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Tower Hall is six stories and houses 251 students along with a dining facility. Tower was accepted on August 1, 2013. This is the third year of metered data for Tower.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Tower comes with a 20 percent premium for compliance with the legislation.

Tower also contains a dining hall. Water and energy consumption will be higher than a typical residence hall due to the process loads associated with food preparation and cleaning.

Tower did not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) <http://www.usgbc.org/projects/ncsu-ccsh-building-1>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Spartan Village Building 1 Lee Residence Hall

Basic Project Data

Total Project Cost	Not available
Project Size (SF)	116,224
Cost/Square Foot	Not available
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	Not available
B Additional Design Fees	
C Total Design Fee	
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	
% of Total Gen Cont(G)	Not available
E Estimated Basic Costs	
F Estimated Additional Costs	
G Total General Contract	Not available
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 127,318
I Metered Utilities Cost	\$ 72,820
J Avoided Utility Cost	\$ 54,498
K % Avoided Utility Cost	43%

Indoor Water (Gallons)

Baseline Water Use	2,900,134
Metered Water Use	1,677,016
Avoided Water Use	1,223,118
% Avoided Water Use	42%

Total Additional Fees & Costs

Additional Design Fees	
Commissioning Fees (Cx)	
Estimated Additional Costs	
Total	Not Available
% of Total Gen Cont(G)	



Spartan Village is a foundation project that is privately developed on state owned land. Project cost data is not available since the project was developed with private money. Lee is an apartment style, four story residence hall that houses 243 students. Lee was accepted on August 7, 2013. This is the third year of meter data for Lee.

Model data was provided for one building and applied to the four different size buildings including Haywood. The model to meter comparison will not be accurate except for Haywood.

Metered utilities consumption and cost meet the requirements of the legislation.

Baseline and proposed water use is high for typical residence hall usage. Metered usage is also high, but meets the requirements of the legislation.

Lee meets the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-spartan-village-hsng-building-1>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Spartan Village Building 3 Haywood Residence Hall

Basic Project Data

Total Project Cost	Not Available
Project Size (SF)	56,295
Cost/Square Foot	
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	Not Available
B Additional Design Fees	
C Total Design Fee	\$ -
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	Not Available
% of Total Gen Cont(G)	
E Estimated Basic Costs	
F Estimated Additional Costs	
G Total General Contract	Not Available
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 127,318
I Metered Utilities Cost	\$ 39,904
J Avoided Utility Cost	\$ 87,414
K % Avoided Utility Cost	69%

Indoor Water (Gallons)

Baseline Water Use	1,736,095
Metered Water Use	831,776
Avoided Water Use	904,319
% Avoided Water Use	52%

Total Additional Fees & Costs

Additional Design Fees	
Commissioning Fees (Cx)	
Estimated Additional Costs	
Total	Not Available
% of Total Gen Cont(G)	



Spartan Village is a foundation project that is privately developed on state owned land. Project cost data is not available since the project was developed with private money. Haywood is an apartment style, four story residence hall that houses 130 students. Haywood was accepted on August 7, 2013. This is the third year of meter data for Haywood.

Model data was provided for one building and applied to the four different size buildings. The model to meter comparison will not be accurate except for Haywood.

Metered utilities consumption and cost meet the requirements of the legislation.

Baseline and proposed water use is high for typical residence hall usage. Metered water usage meets the requirements of the legislation.

Haywood meets the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-spartan-village-hsng-building-3>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Spartan Village Building 4 Union Residence Hall

Basic Project Data

Total Project Cost	Not Available
Project Size (SF)	89,104
Cost/Square Foot	
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	Not Available
B Additional Design Fees	
C Total Design Fee	
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	Not Available
% of Total Gen Cont(G)	
E Estimated Basic Costs	
F Estimated Additional Costs	
G Total General Contract	Not Available
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 127,318
I Metered Utilities Cost	\$ 57,043
J Avoided Utility Cost	\$ 70,275
K % Avoided Utility Cost	55%

Indoor Water (Gallons)

Baseline Water Use	2,627,757
Metered Water Use	1,345,652
Avoided Water Use	1,282,105
% Avoided Water Use	49%

Total Additional Fees & Costs

Additional Design Fees	
Commissioning Fees (Cx)	
Estimated Additional Costs	
Total	Not Available
% of Total Gen Cont(G)	



Spartan Village is a foundation project that is privately developed on state owned land. Project cost data is not available since the project was developed with private money. Union is an apartment style, four story residence hall that houses 209 students. Union was accepted on August 7, 2013. This is the third year of meter data for Union.

Model data was provided for one building and applied to the four different size buildings including Haywood. The model to meter comparison will not be accurate except for Haywood.

Metered utilities consumption and cost meet the requirements of the legislation.

Baseline and proposed water use is high for typical residence hall usage. Metered water usage meets the requirements of the legislation.

Union meets the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-spartan-village-hsng-building-4>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Winston-Salem State University

Martin-Schexnider Residence Hall



Basic Project Data	
Total Project Cost	Not Available
Project Size (SF)	55,626
Cost/Square Foot	Not Available
LEED Certification	Certified (1)
Fees and Costs	
A Basic Design Fee	Not Available
B Additional Design Fees	
C Total Design Fee	\$ -
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	Not Available
% of Total Gen Cont(G)	
E Estimated Basic Costs	\$ 9,516,280
F Estimated Additional Costs	\$ 483,720
G Total General Contract	\$ 10,000,000
% of Total Gen Cont(G)	5%
H Baseline Utilities Cost	\$ 87,219
I Metered Utilities Cost	\$ 101,331
J Avoided Utility Cost	\$ (14,112)
K % Avoided Utility Cost	-16%
Indoor Water (Gallons)	
Baseline Water Use	2,317,437
Metered Water Use	4,179,383
Avoided Water Use	(1,861,946)
% Avoided Water Use	-80%
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ -
Estimated Additional Costs	\$ 483,720
Total	\$ 483,720
% of Total Gen Cont(G)	5%

Martin-Schexnider Residence Hall is a foundation project built with private money and therefore data on the cost of the project is not public. Construction contract amounts are from the designer's life cycle cost analysis and are estimates only, not bid prices. The building has two residential towers that are four stories each with a single story connector housing a lobby and offices. The building houses 227 students. Martin-Schexnider was accepted on August 13, 2013. This is the third year of meter data for Martin-Schexnider.

Natural gas consumption is prorated based on the size of square footage of the building rather than actual building consumption. Therefore, metered utilities cost is not as accurate as it could be with utility meters for energy consumption.

Metered water use is two times what is expected for a typical residence hall.

Martin-Schexnider did not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) <http://www.usgbc.org/projects/wssu-new-residence-hall>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Cape Fear Community College

Union Station



Basic Project Data	
Total Project Cost	\$ 44,492,096
Project Size (SF)	233,900
Cost/Square Foot	\$ 190
LEED Certification	In Progress (1)
Fees and Costs	
A Basic Design Fee	\$ 5,773,835
B Additional Design Fees	\$ 339,250
C Total Design Fee	\$ 6,113,085
% of Total Gen Cont(G)	0.89%
D Commissioning Fees (Cx)	\$ 237,711
% of Total Gen Cont(G)	0.62%
E Estimated Basic Costs	\$ 37,627,193
F Estimated Additional Costs	\$ 514,107
G Total General Contract	\$ 38,141,300
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 407,210
I Metered Utilities Cost	No data
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	1,939,781
Metered Water Use	No data
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ 339,250
Commissioning Fees (Cx)	\$ 237,711
Estimated Additional Costs	\$ 514,107
Total	\$ 1,091,068
% of Total Gen Cont(G)	3%

Union Station is the largest Community College project and second largest project overall at 233,900 square feet completed under the energy savings legislation. The building is five stories and houses classrooms, offices and a large auditorium. Union Station was accepted on August 22, 2013. This is the third year of meter data for Union Station.

Meter data has not been received for Union Station.

Union Station did not meet the requirements of the legislation due to a lack of meter data.

Union Station did not meet the requirements of the legislation last year since metered utility use exceeded modeled utility use.

(1) <http://www.usgbc.org/projects/cfcc-union-station-building>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

East Carolina University

Smith-Williams Center Minges Basketball Practice Facility

Basic Project Data

Total Project Cost	\$ 14,693,676
Project Size (SF)	49,170
Cost/Square Foot	\$ 299
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 736,500
B Additional Design Fees	\$ -
C Total Design Fee	\$ 736,500
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 128,800
% of Total Gen Cont(G)	0.93%
E Estimated Basic Costs	\$ 12,357,348
F Estimated Additional Costs	\$ 1,471,028
G Total General Contract	\$ 13,828,376
% of Total Gen Cont(G)	11%
H Baseline Utilities Cost	\$ 48,568
I Metered Utilities Cost	Incomplete data
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	347,984
Metered Water Use	Incomplete data
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 128,800
Estimated Additional Costs	\$ 1,471,028
Total	\$ 1,599,828
% of Total Gen Cont(G)	12%



Smith-Williams Center is an addition to Minges Coliseum and serves as the practice facility and coaching offices for the men's and women's basketball teams. Smith -Williams was accepted on August 27, 2013. This is the third year of meter data for Smith-Williams Center.

Additional design fees associated with the energy legislation were not identified as part of the design contract. The Estimated Basic Costs (E) were part of the life cycle cost analysis and are not part of an estimate by the contractor. Additional design fees were identified but for additional scope not associated with the practice facility.

Meter data is incomplete for this report and has not been included.

Smith-Williams has not met the requirements of the legislation due to incomplete meter data.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Plaza Hall - Wolf Ridge at Centennial Building 2

Basic Project Data

Total Project Cost	\$ 19,261,636
Project Size (SF)	84,876
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 1,257,728
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,257,728
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 59,424
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 14,286,216
F Estimated Additional Costs	\$ 3,533,388
G Total General Contract	\$ 17,944,484
% of Total Gen Cont(G)	20%
H Baseline Utilities Cost	\$ 102,040
I Metered Utilities Cost	\$ 104,016
J Avoided Utility Cost	\$ (1,976)
K % Avoided Utility Cost	-2%

Indoor Water (Gallons)

Baseline Water Use	2,385,879
Metered Water Use	1,066,648
Avoided Water Use	1,319,231
% Avoided Water Use	55%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 59,424
Estimated Additional Costs	\$ 3,533,388
Total	\$ 3,592,812
% of Total Gen Cont(G)	20%



Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Plaza Hall is six stories and houses 223 students. The building was accepted on December 5, 2013. This is the second year of meter data for Plaza Hall.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Plaza comes with a 20 percent premium for compliance with the legislation.

Estimated baseline water use was high for a residence hall. Metered water use is lower than typically seen for a residence hall.

Plaza Hall did not meet the requirements of the legislation since metered utility use exceeded metered utility use.

(1) <http://www.usgbc.org/projects/ncsu-ccsh-building-2>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Spartan Village Building 2 Highland Residence Hall



Basic Project Data	
Total Project Cost	Not Available
Project Size (SF)	56,295
Cost/Square Foot	Not Available
LEED Certification	In Progress (1)
Fees and Costs	
A Basic Design Fee	Not Available
B Additional Design Fees	
C Total Design Fee	\$ -
% of Total Gen Cont(G)	
D Commissioning Fees (Cx)	Not Available
% of Total Gen Cont(G)	
E Estimated Basic Costs	
F Estimated Additional Costs	
G Total General Contract	Not Available
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 127,318
I Metered Utilities Cost	\$ 76,128
J Avoided Utility Cost	\$ 51,190
K % Avoided Utility Cost	40%
Indoor Water (Gallons)	
Baseline Water Use	2,916,495
Metered Water Use	1,756,304
Avoided Water Use	1,160,191
% Avoided Water Use	40%
Total Additional Fees & Costs	
Additional Design Fees	
Commissioning Fees (Cx)	
Estimated Additional Costs	
Total	Not Available
% of Total Gen Cont(G)	

Spartan Village is a foundation project that is privately developed on state owned land. Project cost data is not available since the project was developed with private money. Highland is an apartment style, four story residence hall that houses 231 students. Highland was accepted on January 9, 2014. This is the second year of meter data for Highland.

Model data was provided for one building and applied to the four different size buildings. The model to meter comparison will not be accurate except for building 3.

The estimated baseline water use was high for a residence hall while the metered water use was similar to average consumption.

Highland Residence Hall has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/uncg-spartan-village-hsng-building-2>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

PORTAL



Basic Project Data	
Total Project Cost	\$ 28,203,608
Project Size (SF)	102,914
Cost/Square Foot	\$ 274
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 2,215,000
B Additional Design Fees	\$ -
C Total Design Fee	\$ 2,215,000
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 240,424
% of Total Gen Cont(G)	0.93%
E Estimated Basic Costs	\$ 24,736,184
F Estimated Additional Costs	\$ 1,012,000
G Total General Contract	\$ 25,748,184
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 142,246
I Metered Utilities Cost	\$ 81,084
J Avoided Utility Cost	\$ 61,162
K % Avoided Utility Cost	43%
Indoor Water (Gallons)	
Baseline Water Use	776,459
Metered Water Use	98,968
Avoided Water Use	677,491
% Avoided Water Use	87%
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 240,424
Estimated Additional Costs	\$ 1,012,000
Total	\$ 1,252,424
% of Total Gen Cont(G)	5%

PORTAL or the Partnership, Outreach, and Research To Accelerate Learning facility is a four floor office facility that houses business suites for workspace and an innovation center for regional and global business pioneers. PORTAL was accepted on January 28, 2014. This is the second year of meter data for PORTAL.

Metered utilities cost indicated a 43% reduction from the baseline utilities cost while the metered utilities consumption indicated a 6% increase from the baseline utilities consumption. The difference indicates the utilities rates used to generate the baseline data did not agree with the utilities rates applied to the building as metered.

Water use is limited to flushing fixtures and lavatories and is difficult to predict for an office building.

PORTAL did not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Innovation Hall - Wolf Ridge at Centennial Bldg 3



Basic Project Data	
Total Project Cost	\$ 20,086,784
Project Size (SF)	88,512
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)
Fees and Costs	
A Basic Design Fee	\$ 1,311,607
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,311,607
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 61,970
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 15,028,452
F Estimated Additional Costs	\$ 3,684,755
G Total General Contract	\$ 18,713,207
% of Total Gen Cont(G)	20%
H Baseline Utilities Cost	\$ 91,459
I Metered Utilities Cost	\$ 87,059
J Avoided Utility Cost	\$ 4,400
K % Avoided Utility Cost	5%
Indoor Water (Gallons)	
Baseline Water Use	2,343,922
Metered Water Use	513,876
Avoided Water Use	1,830,046
% Avoided Water Use	78%
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 61,970
Estimated Additional Costs	\$ 3,684,755
Total	\$ 3,746,725
% of Total Gen Cont(G)	20%

Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Innovation Hall is six stories and houses 219 students. Innovation was accepted on February 6, 2014. This is the second year of meter data for Innovation.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Innovation comes with a 20 percent premium for compliance with the legislation.

Estimated baseline water use was high for a residence hall and the metered water use is much lower than typically seen for a residence hall.

Baseline and metered utilities cost and consumption are approximately the same, indicating the correct utility rates were used in the model.

Innovation does not meet the requirements of the legislation since metered utility use exceeded modeled utility use. But, Innovation does meet the requirements of ASHRAE 100-2015.

(1) Silver certification not viewable from USGBC website

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Winston-Salem State University

Hill Hall Renovation



Basic Project Data	
Total Project Cost	\$ 12,105,470
Project Size (SF)	37,898
Cost/Square Foot	\$ 319
LEED Certification	Gold (1)
Fees and Costs	
A Basic Design Fee	\$ 1,025,000
B Additional Design Fees	\$ 100,000
C Total Design Fee	\$ 1,125,000
% of Total Gen Cont(G)	0.92%
D Commissioning Fees (Cx)	\$ 90,000
% of Total Gen Cont(G)	0.83%
E Estimated Basic Costs	\$ 10,890,470
F Estimated Additional Costs	\$ -
G Total General Contract	\$ 10,890,470
% of Total Gen Cont(G)	0%
H Baseline Utilities Cost	\$ 41,267
I Metered Utilities Cost	\$ 77,663
J Avoided Utility Cost	\$ (36,396)
K % Avoided Utility Cost	-88%
Indoor Water (Gallons)	
Baseline Water Use	2,719,308
Metered Water Use	238,612
Avoided Water Use	2,480,696
% Avoided Water Use	91%
Total Additional Fees & Costs	
Additional Design Fees	\$ 100,000
Commissioning Fees (Cx)	\$ 90,000
Estimated Additional Costs	\$ -
Total	\$ 190,000
% of Total Gen Cont(G)	2%

Hill Hall is a renovation project of an existing three floor building for an office and tutoring center. The building also received small additions. Hill Hall was accepted on March 25, 2014. This is the second year of meter data for Hill Hall.

The designer's estimate for additional construction costs was negative, so zero was used here. Neither number is accurate.

Thermal utilities or chilled water and steam are billed on building size instead of metered consumption. Therefore, the utilities metered cost will not be accurate.

Baseline water use was very high for this type of building leading to a high amount of avoided water use.

Hill Hall did not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) <http://www.usgbc.org/projects/wssu-hill-hall-renovation>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Grove Hall - Wolf Ridge at Centennial Bldg 5



Basic Project Data

Total Project Cost	\$ 14,216,565
Project Size (SF)	62,645
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 928,299
B Additional Design Fees	\$ -
C Total Design Fee	\$ 928,299
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 43,860
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 10,636,495
F Estimated Additional Costs	\$ 2,607,911
G Total General Contract	\$ 13,244,406
% of Total Gen Cont(G)	20%
H Baseline Utilities Cost	\$ 73,439
I Metered Utilities Cost	\$ 76,081
J Avoided Utility Cost	\$ (2,642)
K % Avoided Utility Cost	-4%

Indoor Water (Gallons)

Baseline Water Use	1,557,237
Metered Water Use	488,444
Avoided Water Use	1,068,793
% Avoided Water Use	69%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 43,860
Estimated Additional Costs	\$ 2,607,911
Total	\$ 2,651,771
% of Total Gen Cont(G)	20%

Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Grove Hall is six stories and houses 144 students. Grove Hall was accepted on April 9, 2014. This is the second year of meter data for Grove.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Grove comes with a 20 percent premium for compliance with the legislation.

Estimated baseline water use is high for a residence hall. Metered water use low for a residence hall resulting in a higher than expected amount of avoided water use.

Baseline and metered utilities cost and consumption are approximately the same, indicating the correct utility rates were used in the model.

Grove has not met the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) Silver certification not viewable from USGBC website

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Valley Hall - Wolf Ridge at Centennial Bldg 4



Basic Project Data

Total Project Cost	\$ 18,940,291
Project Size (SF)	83,460
Cost/Square Foot	\$ 227
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 1,236,745
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,236,745
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 58,433
% of Total Gen Cont(G)	0.33%
E Estimated Basic Costs	\$ 14,170,673
F Estimated Additional Costs	\$ 3,474,440
G Total General Contract	\$ 17,645,113
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 96,219
I Metered Utilities Cost	\$ 84,361
J Avoided Utility Cost	\$ 11,858
K % Avoided Utility Cost	12%

Indoor Water (Gallons)

Baseline Water Use	2,343,922
Metered Water Use	154,088
Avoided Water Use	2,189,834
% Avoided Water Use	93%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 58,433
Estimated Additional Costs	\$ 3,474,440
Total	\$ 3,532,873
% of Total Gen Cont(G)	20%

Wolf Ridge is a six building student housing complex on NCSU's Centennial Campus. Valley Hall is six stories and houses 219 students. Valley Hall was accepted on May 9, 2014. This is the second year of meter data for Valley.

Estimated additional costs were calculated for Plaza only. Estimated additional costs for Plaza equated to \$41.63/GSF which is extremely high and not realistic for traditional energy efficient building systems. Valley comes with a 20 percent premium for compliance with the legislation.

Estimated baseline water use was high for a residence hall while metered usage equates to 704 gallons/student/year and is not realistic.

The owner is required to review meter readings for reconciliation with the model.

Valley Hall does not meet the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) Silver certification not viewable from USGBC website

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Guilford Technical Community College

Aviation Center III Building



Basic Project Data	
Total Project Cost	\$ 7,371,349
Project Size (SF)	42,087
Cost/Square Foot	\$ 175
LEED Certification	In Progress (1)
Fees and Costs	
A Basic Design Fee	\$ 666,500
B Additional Design Fees	\$ 20,000
C Total Design Fee	\$ 686,500
% of Total Gen Cont(G)	0.31%
D Commissioning Fees (Cx)	\$ 149,249
% of Total Gen Cont(G)	2.28%
E Estimated Basic Costs	Not Available
F Estimated Additional Costs	\$ -
G Total General Contract	\$ 6,535,600
% of Total Gen Cont(G)	
H Baseline Utilities Cost	\$ 68,705
I Metered Utilities Cost	\$ 39,963
J Avoided Utility Cost	\$ 28,742
K % Avoided Utility Cost	42%
Indoor Water (Gallons)	
Baseline Water Use	1,135,125
Metered Water Use	63,580
Avoided Water Use	1,071,545
% Avoided Water Use	94%
Total Additional Fees & Costs	
Additional Design Fees	\$ 20,000
Commissioning Fees (Cx)	\$ 149,249
Estimated Additional Costs	\$ -
Total	\$ 169,249
% of Total Gen Cont(G)	3%

Aviation Center III Building is a four floor office, lab and classroom building that houses GTCC's Aviation Management and Career Pilot programs as well as additional classrooms for customized industry training. Aviation III is the first building and land that GTCC owns at the Piedmont Triad International Airport. Aviation III was accepted on July 21, 2014. This is the second year of meter data for Aviation III.

Metered utilities cost indicated a 42% reduction from the baseline utilities cost while the metered utilities consumption indicated a 14% reduction from the baseline utilities consumption. The difference indicates the utilities rates used to generate the baseline data did not agree with the utilities rates applied to the building as metered.

Baseline water use is high while metered water use is quite low. Water use is difficult to predict for a classroom building.

The baseline modeled energy consumption was low for this type of building while the metered utilities consumption is fairly normal.

Aviation III has not met the requirements of the legislation since metered utility use exceeded modeled utility use.

(1) <http://www.usgbc.org/projects/gtcc-aviation-classroom-building>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Martin Residence Hall



Basic Project Data	
Total Project Cost	\$ 38,101,017
Project Size (SF)	174,657
Cost/Square Foot	\$ 218
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 2,718,245
B Additional Design Fees	\$ 15,000
C Total Design Fee	\$ 2,733,245
% of Total Gen Cont(G)	0.04%
D Commissioning Fees (Cx)	\$ 175,000
% of Total Gen Cont(G)	0.50%
E Estimated Basic Costs	\$ 29,686,104
F Estimated Additional Costs	\$ 5,506,668
G Total General Contract	\$ 35,192,772
% of Total Gen Cont(G)	16%
H Baseline Utilities Cost	\$ 306,609
I Metered Utilities Cost	\$ 128,462
J Avoided Utility Cost	\$ 178,147
K % Avoided Utility Cost	58%
Indoor Water (Gallons)	
Baseline Water Use	4,970,906
Metered Water Use	5,002,818
Avoided Water Use	(31,912)
% Avoided Water Use	-1%
Total Additional Fees & Costs	
Additional Design Fees	\$ 15,000
Commissioning Fees (Cx)	\$ 175,000
Estimated Additional Costs	\$ 5,506,668
Total	\$ 5,696,668
% of Total Gen Cont(G)	16%

Martin Residence Hall is a six story residence hall that houses 408 students. Martin was accepted on August 13, 2014. This is the second year of meter data for Martin Residence Hall.

The avoided utilities cost based on meter data is 58% less than the baseline utilities cost.

The estimated additional construction costs at 16% of the total general contract are much higher than typically seen for a residence hall and results in a much higher than typical increase in total estimated project cost. The 16% increase is also much higher than national average.

Metered water use was much higher than expected for a typical residence hall.

Martin Residence Hall has met the requirements of the legislation for utility consumption.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC School of the Arts

New Library Building



Basic Project Data	
Total Project Cost	\$ 17,375,157
Project Size (SF)	73,432
Cost/Square Foot	\$ 237
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 1,833,332
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,833,332
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 108,825
% of Total Gen Cont(G)	0.71%
E Estimated Basic Costs	\$ 14,308,234
F Estimated Additional Costs	\$ 1,124,766
G Total General Contract	\$ 15,433,000
% of Total Gen Cont(G)	7%
H Baseline Utilities Cost	\$ 90,245
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	706,800
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 108,825
Estimated Additional Costs	\$ 1,124,766
Total	\$ 1,233,591
% of Total Gen Cont(G)	8%

The New Library Building is a four story library that serves as the campus central library. New Library Building was accepted on September 9, 2014. This is the first year of meter data for the library.

The New Library has not met the requirements of the legislation due to a lack of meter data.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NCA+T State University

Student Health Center



Basic Project Data

Total Project Cost	\$ 8,280,900
Project Size (SF)	27,548
Cost/Square Foot	\$ 301
LEED Certification	In Progress (1)

Fees and Costs

A Basic Design Fee	\$ 693,500
B Additional Design Fees	\$ 92,000
C Total Design Fee	\$ 785,500
% of Total Gen Cont(G)	1.24%
D Commissioning Fees (Cx)	\$ 51,400
% of Total Gen Cont(G)	0.69%
E Estimated Basic Costs	\$ 7,251,633
F Estimated Additional Costs	\$ 192,367
G Total General Contract	\$ 7,444,000
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 50,033
I Metered Utilities Cost	\$ 25,484
J Avoided Utility Cost	\$ 24,549
K % Avoided Utility Cost	49%

Indoor Water (Gallons)

Baseline Water Use	154,588
Metered Water Use	109,208
Avoided Water Use	45,380
% Avoided Water Use	29%

Total Additional Fees & Costs

Additional Design Fees	\$ 92,000
Commissioning Fees (Cx)	\$ 51,400
Estimated Additional Costs	\$ 192,367
Total	\$ 335,767
% of Total Gen Cont(G)	5%

Student Health Center is a two story student health center to accommodate a growing student population and to replace an aged and inadequate facility. The Center contains medical examination and treatment rooms as well as offices for staff. The Student Health Center was accepted on October 29, 2014. This is the first year of meter data for Student Health Center.

Metered utilities cost indicated a 49% reduction from the baseline utilities cost while the metered utilities consumption indicated an 8% reduction from the baseline utilities consumption. The difference indicates the utilities rates used to generate the baseline data did not agree with the utilities rates applied to the building as metered.

Student Health Center has not met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/ncat-student-health-center>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

Campus Police



Basic Project Data

Total Project Cost	\$ 7,079,420
Project Size (SF)	25,877
Cost/Square Foot	\$ 274
LEED Certification	Silver (1)

Fees and Costs

A Basic Design Fee	\$ 811,040
B Additional Design Fees	\$ 43,000
C Total Design Fee	\$ 854,040
% of Total Gen Cont(G)	0.70%
D Commissioning Fees (Cx)	\$ 81,680
% of Total Gen Cont(G)	1.33%
E Estimated Basic Costs	\$ 5,720,098
F Estimated Additional Costs	\$ 423,602
G Total General Contract	\$ 6,143,700
% of Total Gen Cont(G)	7%
H Baseline Utilities Cost	\$ 44,281
I Metered Utilities Cost	\$ 48,415
J Avoided Utility Cost	\$ (4,134)
K % Avoided Utility Cost	-9%

Indoor Water (Gallons)

Baseline Water Use	617,945
Metered Water Use	106,964
Avoided Water Use	510,981
% Avoided Water Use	83%

Total Additional Fees & Costs

Additional Design Fees	\$ 43,000
Commissioning Fees (Cx)	\$ 81,680
Estimated Additional Costs	\$ 423,602
Total	\$ 548,282
% of Total Gen Cont(G)	9%

The Campus Police building is two stories and serves as the centralized facility for the UNCG police. The Campus Police facility was accepted on November 12, 2014. This is the first year of meter data for the Campus Police facility.

The Campus Police facility has not met the requirements of the legislation since metered utility use exceeded modeled utility use by 18%.

(1) <http://www.usgbc.org/projects/uncg-campus-police>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

South Village Crossing



Basic Project Data

Total Project Cost	\$ 28,718,852
Project Size (SF)	56,146
Cost/Square Foot	\$ 512
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 1,840,410
B Additional Design Fees	\$ 78,000
C Total Design Fee	\$ 1,918,410
% of Total Gen Cont(G)	0.29%
D Commissioning Fees (Cx)	\$ 182,024
% of Total Gen Cont(G)	0.68%
E Estimated Basic Costs	\$ 25,649,718
F Estimated Additional Costs	\$ 968,700
G Total General Contract	\$ 26,618,418
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 163,454
I Metered Utilities Cost	\$ 192,698
J Avoided Utility Cost	\$ (29,244)
K % Avoided Utility Cost	-18%

Indoor Water (Gallons)

Baseline Water Use	546,557
Metered Water Use	4,194,417
Avoided Water Use	(3,647,860)
% Avoided Water Use	-667%

Total Additional Fees & Costs

Additional Design Fees	\$ 78,000
Commissioning Fees (Cx)	\$ 182,024
Estimated Additional Costs	\$ 968,700
Total	\$ 1,228,724
% of Total Gen Cont(G)	5%

South Village Crossing or SoVi is a new two story dining facility that serves the new and renovated residence halls on the south side of campus. Dining options include all you can eat and a Denny's. SoVi was accepted on November 21, 2014. This is the first year of meter data for SoVi.

Domestic water baseline use was grossly underestimated for a food service facility resulting in a large negative percentage for avoided water use.

SoVi has not met the requirements of the legislation since the metered utilities use exceeds the baseline utilities use by 33 percent.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Greensboro

William E. Moran Commons and Plaza



Basic Project Data

Total Project Cost	\$ 31,580,459
Project Size (SF)	111,160
Cost/Square Foot	\$ 284
LEED Certification	None

Fees and Costs

A	Basic Design Fee	\$ 2,777,884
B	Additional Design Fees	\$ 60,000
C	Total Design Fee	\$ 2,837,884
	% of Total Gen Cont(G)	0.21%
D	Commissioning Fees (Cx)	\$ 283,540
	% of Total Gen Cont(G)	1.00%
E	Estimated Basic Costs	\$ 27,434,098
F	Estimated Additional Costs	\$ 1,024,937
G	Total General Contract	\$ 28,459,035
	% of Total Gen Cont(G)	4%
H	Baseline Utilities Cost	\$ 269,366
I	Metered Utilities Cost	Incomplete data.
J	Avoided Utility Cost	
K	% Avoided Utility Cost	
Indoor Water (Gallons)		
	Baseline Water Use	6,216,053
	Metered Water Use	Incomplete data.
	Avoided Water Use	
	% Avoided Water Use	
Total Additional Fees & Costs		
	Additional Design Fees	\$ 60,000
	Commissioning Fees (Cx)	\$ 283,540
	Estimated Additional Costs	\$ 1,024,937
	Total	\$ 1,368,477
	% of Total Gen Cont(G)	5%

Moran Commons is the central dining facility for UNCG. The building was gutted and completely renovated. Moran contains fast food vendors and all you can eat cafeteria plans. Moran was accepted on February 5, 2015. This is the first year of meter data for Moran.

Moran has not met the requirements of the legislation due to incomplete meter data.

Fees and Costs Defined:

A	Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee: from the design contract (Fee does not include design amendments)
D	Commissioning Fees: contract amount with owner
E	Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs: from the designer's life cycle cost analysis
G	Total General Contract: from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost: meter data from the owner
J	Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Winston Salem State University

Center for Design Innovation



Basic Project Data

Total Project Cost	\$ 9,508,027
Project Size (SF)	23,982
Cost/Square Foot	\$ 396
LEED Certification	In Progress (1)

The Center for Design Innovation (CDI) is a multi-campus research center of the University of North Carolina system. CDI was accepted on March 3, 2015.

Fees and Costs

A Basic Design Fee	\$ 650,000
B Additional Design Fees	\$ 50,000
C Total Design Fee	\$ 700,000
% of Total Gen Cont(G)	0.57%
D Commissioning Fees (Cx)	\$ 80,300
% of Total Gen Cont(G)	0.92%
E Estimated Basic Costs	\$ 8,464,497
F Estimated Additional Costs	\$ 263,230
G Total General Contract	\$ 8,727,727
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 106,582
I Metered Utilities Cost	\$ 40,841
J Avoided Utility Cost	\$ 65,741
K % Avoided Utility Cost	62%

This is the first year of meter data for CDI.

CDI has met the requirements of the legislation.

Indoor Water (Gallons)

Baseline Water Use	67,775
Metered Water Use	8,654
Avoided Water Use	59,121
% Avoided Water Use	87%

Total Additional Fees & Costs

Additional Design Fees	\$ 50,000
Commissioning Fees (Cx)	\$ 80,300
Estimated Additional Costs	\$ 263,230
Total	\$ 393,530
% of Total Gen Cont(G)	5%

(1) <http://www.usgbc.org/projects/center-design-innovation>

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Fayetteville State University

Jones Student Center Addition and Renovation



Basic Project Data	
Total Project Cost	\$ 18,834,307
Project Size (SF)	82,961
Cost/Square Foot	\$ 227
LEED Certification	In Progress (1)
Fees and Costs	
A Basic Design Fee	\$ 1,536,300
B Additional Design Fees	\$ -
C Total Design Fee	\$ 1,536,300
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 207,560
% of Total Gen Cont(G)	1.21%
E Estimated Basic Costs	\$ 16,905,530
F Estimated Additional Costs	\$ 184,917
G Total General Contract	\$ 17,090,447
% of Total Gen Cont(G)	1%
H Baseline Utilities Cost	\$ 215,110
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	4,017,684
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 207,560
Estimated Additional Costs	\$ 184,917
Total	\$ 392,477
% of Total Gen Cont(G)	2%

Jones Student Center was accepted on March 6, 2015. This is the first year of meter data for Jones.

Jones is a two story building that contains dining, offices, ballroom, meeting spaces, etc.

Jones has not met the requirements of the legislation due to a lack of meter data.

(1) <http://www.usgbc.org/projects/rudolph-jones-student-center>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC School of the Arts

Campus Police Facility



Basic Project Data	
Total Project Cost	\$ 3,420,485
Project Size (SF)	9,023
Cost/Square Foot	\$ 379
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 292,220
B Additional Design Fees	\$ -
C Total Design Fee	\$ 292,220
% of Total Gen Cont(G)	\$ -
D Commissioning Fees (Cx)	\$ 68,561
% of Total Gen Cont(G)	2.24%
E Estimated Basic Costs	\$ 2,968,673
F Estimated Additional Costs	\$ 91,031
G Total General Contract	\$ 3,059,704
% of Total Gen Cont(G)	3%
H Baseline Utilities Cost	\$ 18,288
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	289,717
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 68,561
Estimated Additional Costs	\$ 91,031
Total	\$ 159,592
% of Total Gen Cont(G)	5%

The Campus Police Facility was accepted on March 12, 2015.

This is the smallest building in the program at 9,023 gross square feet.

The building serves as the centralized facility for the UNCSA police

This is the first year of meter data for the Campus Police Facility.

The facility has not met the requirements of the legislation due to a lack of meter data.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC School of the Arts

Central Storage Facility



Basic Project Data	
Total Project Cost	\$ 5,922,266
Project Size (SF)	43,637
Cost/Square Foot	\$ 136
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 596,884
B Additional Design Fees	\$ -
C Total Design Fee	\$ 596,884
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 65,343
% of Total Gen Cont(G)	1.24%
E Estimated Basic Costs	\$ 4,859,303
F Estimated Additional Costs	\$ 400,736
G Total General Contract	\$ 5,260,039
% of Total Gen Cont(G)	8%
H Baseline Utilities Cost	\$ 27,891
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	128,137
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 65,343
Estimated Additional Costs	\$ 400,736
Total	\$ 466,079
% of Total Gen Cont(G)	9%

The Central Storage Facility holds the production sets and other items used in the school's productions. It also house the Purchasing Department and Surplus Property Shop. Central Storage was accepted on March 25, 2015.

This is the first year of meter data for the Central Storage Facility.

The facility has not met the requirements of the legislation due to a lack of meter data.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

NC State University

Talley Student Center Addition and Renovation



Basic Project Data		
Total Project Cost	\$	98,721,187
Project Size (SF)		294,736
Cost/Square Foot	\$	335
LEED Certification		Silver (1)
Fees and Costs		
A Basic Design Fee	\$	8,900,579
B Additional Design Fees	\$	178,918
C Total Design Fee	\$	9,079,497
% of Total Gen Cont(G)		0.20%
D Commissioning Fees (Cx)	\$	526,000
% of Total Gen Cont(G)		0.59%
E Estimated Basic Costs	\$	88,272,832
F Estimated Additional Costs	\$	842,858
G Total General Contract	\$	89,115,690
% of Total Gen Cont(G)		1%
H Baseline Utilities Cost	\$	940,212
I Metered Utilities Cost	\$	787,074
J Avoided Utility Cost	\$	153,138
K % Avoided Utility Cost		16%
Indoor Water (Gallons)		
Baseline Water Use		1,088,442
Metered Water Use		5,333,251
Avoided Water Use		(4,244,809)
% Avoided Water Use		-390%
Total Additional Fees & Costs		
Additional Design Fees	\$	178,918
Commissioning Fees (Cx)	\$	526,000
Estimated Additional Costs	\$	842,858
Total	\$	1,547,776
% of Total Gen Cont(G)		2%

Talley Student Center is 5 stories and was accepted on May 7, 2015.

Talley is the largest building in the study to date.

Talley is considered the campus hub and houses offices, ballrooms, food courts, theater, conference rooms, meeting spaces, book store and many more spaces.

This is the first year of meter data for Talley.

Talley has not met the requirements of the legislation since metered utility use exceeds modeled utility use.

Metered water use greatly exceeds baseline water use, but can be attributed to high process water use associated with food service preparation and cleaning.

(1) <http://www.usgbc.org/projects/ncsu-talley-student-center>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Nash Community College

Continuing Education and Public Services Building



Basic Project Data

Total Project Cost	\$ 12,224,888
Project Size (SF)	79,295
Cost/Square Foot	\$ 154
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 861,998
B Additional Design Fees	\$ -
C Total Design Fee	\$ 861,998
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 52,620
% of Total Gen Cont(G)	0.47%
E Estimated Basic Costs	\$ 10,460,046
F Estimated Additional Costs	\$ 850,224
G Total General Contract	\$ 11,310,270
% of Total Gen Cont(G)	8%
H Baseline Utilities Cost	\$ 95,436
I Metered Utilities Cost	\$ 114,944
J Avoided Utility Cost	\$ (19,508)
K % Avoided Utility Cost	-20%

Indoor Water (Gallons)

Baseline Water Use	2,356,578
Metered Water Use	950,708
Avoided Water Use	1,405,870
% Avoided Water Use	60%

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 52,620
Estimated Additional Costs	\$ 850,224
Total	\$ 902,844
% of Total Gen Cont(G)	8%

The Continuing Education and Public Services Building includes an indoor gun range with eight-lanes within 3,000 square foot. The building also includes 31 classrooms and nine labs. The building was accepted on June 5, 2015. This is the first year of meter data for the building.

Students enrolled in Emergency Medical Services, Fire and Law Enforcement programs use the multipurpose room for rope rescue, extrication, agricultural machinery rescue, practical skills evaluation and other training exercises.

The building does not meet the requirements of the legislation for energy consumption since the metered utility use exceeds the modeled utility use.

The building has met the requirements for reduced water consumption.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC School of the Arts

Film School Production Design Facility



Basic Project Data

Total Project Cost	\$ 8,696,306
Project Size (SF)	29,936
Cost/Square Foot	\$ 290
LEED Certification	None

Fees and Costs

A Basic Design Fee	\$ 827,850
B Additional Design Fees	\$ -
C Total Design Fee	\$ 827,850
% of Total Gen Cont(G)	0.00%
D Commissioning Fees (Cx)	\$ 47,760
% of Total Gen Cont(G)	0.61%
E Estimated Basic Costs	\$ 7,341,740
F Estimated Additional Costs	\$ 478,956
G Total General Contract	\$ 7,820,696
% of Total Gen Cont(G)	6%
H Baseline Utilities Cost	\$ 148,285
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	

Indoor Water (Gallons)

Baseline Water Use	55,005
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	

Total Additional Fees & Costs

Additional Design Fees	\$ -
Commissioning Fees (Cx)	\$ 47,760
Estimated Additional Costs	\$ 478,956
Total	\$ 526,716
% of Total Gen Cont(G)	7%

The Film School Production Design Facility houses the Art Direction and Animation Departments. The facility was accepted on June 16, 2015. This is the first year of meter data for the Film School Production Design Facility.

A combination of shops, studios, and labs, the new facility integrates traditional craft and fine arts with innovative technology and equipment. Shop spaces include high-bay wood shop, high-bay paint deck with spray booth, metal shop with two welding booths, and craft shop for casting, sewing, and dying. Studio spaces have both drawing boards and digital media for production, animation, and gaming.

The Film School Production Design Facility has not met the requirements of the legislation due to a lack of meter data.

Fees and Costs Defined:

A Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C Total Design Fee:	from the design contract (Fee does not include design amendments)
D Commissioning Fees:	contract amount with owner
E Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F Estimated Additional Costs:	from the designer's life cycle cost analysis
G Total General Contract:	from the construction contract (Amount does not include change orders)
H Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I Metered Utilities Cost:	meter data from the owner
J Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Holshouser Residence Hall Renovation



Basic Project Data

Total Project Cost	\$ 16,519,186
Project Size (SF)	99,713
Cost/Square Foot	\$ 166
LEED Certification	None

Fees and Costs

A	Basic Design Fee	\$ 1,239,670
B	Additional Design Fees	\$ 11,880
C	Total Design Fee	\$ 1,251,550
	% of Total Gen Cont(G)	0.08%
D	Commissioning Fees (Cx)	\$ 95,000
	% of Total Gen Cont(G)	0.63%
E	Estimated Basic Costs	\$ 14,727,569
F	Estimated Additional Costs	\$ 445,067
G	Total General Contract	\$ 15,172,636
	% of Total Gen Cont(G)	3%
H	Baseline Utilities Cost	\$ 169,440
I	Metered Utilities Cost	No data.
J	Avoided Utility Cost	
K	% Avoided Utility Cost	
Indoor Water (Gallons)		
	Baseline Water Use	3,663,471
	Metered Water Use	No data.
	Avoided Water Use	
	% Avoided Water Use	
Total Additional Fees & Costs		
	Additional Design Fees	\$ 11,880
	Commissioning Fees (Cx)	\$ 95,000
	Estimated Additional Costs	\$ 445,067
	Total	\$ 551,947
	% of Total Gen Cont(G)	4%

Holshouser is a 12 story residence hall that housed 400 students. Holshouser was accepted on July 28, 2015.

This is the first year of meter data for Holshouser.

Meter data for Holshouser was not available in time for inclusion in the 2016 report.

Fees and Costs Defined:

A	Basic Design Fee:	noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees:	noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee:	from the design contract (Fee does not include design amendments)
D	Commissioning Fees:	contract amount with owner
E	Estimated Basic Costs:	the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs:	from the designer's life cycle cost analysis
G	Total General Contract:	from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost:	from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost:	meter data from the owner
J	Avoided Utility Cost:	modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings:	percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Laurel Residence Hall



Basic Project Data	
Total Project Cost	\$ 31,277,191
Project Size (SF)	143,986
Cost/Square Foot	\$ 217
LEED Certification	None
Fees and Costs	
A Basic Design Fee	\$ 2,298,145
B Additional Design Fees	\$ 13,945
C Total Design Fee	\$ 2,312,090
% of Total Gen Cont(G)	0.05%
D Commissioning Fees (Cx)	\$ 200,000
% of Total Gen Cont(G)	0.70%
E Estimated Basic Costs	\$ 27,245,245
F Estimated Additional Costs	\$ 1,519,856
G Total General Contract	\$ 28,765,101
% of Total Gen Cont(G)	5%
H Baseline Utilities Cost	\$ 102,473
I Metered Utilities Cost	No data.
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	4,730,466
Metered Water Use	No data.
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ 13,945
Commissioning Fees (Cx)	\$ 200,000
Estimated Additional Costs	\$ 1,519,856
Total	\$ 1,733,801
% of Total Gen Cont(G)	6%

Laurel is a six story residence hall that houses 412 students. Laurel was accepted on July 29, 2015. This is the first year of meter data for Laurel.

Meter data for Laurel was not available in time for inclusion in the 2016 report.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

Appalachian State University

Belk Residence Hall Renovation



Basic Project Data	
Total Project Cost	\$ 8,048,150
Project Size (SF)	32,839
Cost/Square Foot	\$ 245
LEED Certification	Silver (1)
Fees and Costs	
A Basic Design Fee	\$ 755,800
B Additional Design Fees	\$ 50,600
C Total Design Fee	\$ 806,400
% of Total Gen Cont(G)	0.70%
D Commissioning Fees (Cx)	\$ 19,450
% of Total Gen Cont(G)	0.27%
E Estimated Basic Costs	\$ 6,870,211
F Estimated Additional Costs	\$ 352,089
G Total General Contract	\$ 7,222,300
% of Total Gen Cont(G)	5%
H Baseline Utilities Cost	\$ 87,029
I Metered Utilities Cost	\$ 70,016
J Avoided Utility Cost	\$ 17,013
K % Avoided Utility Cost	20%
Indoor Water (Gallons)	
Baseline Water Use	1,209,992
Metered Water Use	1,103,000
Avoided Water Use	106,992
% Avoided Water Use	9%
Total Additional Fees & Costs	
Additional Design Fees	\$ 50,600
Commissioning Fees (Cx)	\$ 19,450
Estimated Additional Costs	\$ 352,089
Total	\$ 422,139
% of Total Gen Cont(G)	6%

Belk is a five story residence hall that houses 176 students. Belk was accepted on July 30, 2015. This is the first year of meter data for Belk.

Belk Residence hall has met the requirements of the legislation.

(1) <http://www.usgbc.org/projects/belk-hall-residence-hall-renovation>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Wilmington

Osprey Hall



Basic Project Data

Total Project Cost	\$ 10,795,380
Project Size (SF)	43,554
Cost/Square Foot	\$ 248
LEED Certification	None

Fees and Costs

A	Basic Design Fee	\$ 859,450
B	Additional Design Fees	\$ 17,250
C	Total Design Fee	\$ 876,700
	% of Total Gen Cont(G)	0.18%
D	Commissioning Fees (Cx)	\$ 98,205
	% of Total Gen Cont(G)	1.00%
E	Estimated Basic Costs	\$ 9,699,722
F	Estimated Additional Costs	\$ 120,753
G	Total General Contract	\$ 9,820,475
	% of Total Gen Cont(G)	1%
H	Baseline Utilities Cost	\$ 110,349
I	Metered Utilities Cost	No data.
J	Avoided Utility Cost	
K	% Avoided Utility Cost	
Indoor Water (Gallons)		
	Baseline Water Use	1,075,870
	Metered Water Use	No data.
	Avoided Water Use	
	% Avoided Water Use	
Total Additional Fees & Costs		
	Additional Design Fees	\$ 17,250
	Commissioning Fees (Cx)	\$ 98,205
	Estimated Additional Costs	\$ 120,753
	Total	\$ 236,208
	% of Total Gen Cont(G)	2%

Osprey Hall is a complete renovation of an existing two story classroom, office and laboratory building. Osprey was accepted on August 3, 2015.

This is the first year of meter data for Osprey.

Osprey has not met the requirements of the legislation due to a lack of meter data.

Fees and Costs Defined:

A	Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
B	Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
C	Total Design Fee: from the design contract (Fee does not include design amendments)
D	Commissioning Fees: contract amount with owner
E	Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
F	Estimated Additional Costs: from the designer's life cycle cost analysis
G	Total General Contract: from the construction contract (Amount does not include change orders)
H	Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
I	Metered Utilities Cost: meter data from the owner
J	Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
K	Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

East Carolina University



Gateway Residence Hall

Basic Project Data	
Total Project Cost	\$ 52,377,303
Project Size (SF)	208,077
Cost/Square Foot	\$ 252
LEED Certification	In Progress (1)
Fees and Costs	
A Basic Design Fee	\$ 3,825,950
B Additional Design Fees	\$ 91,100
C Total Design Fee	\$ 3,917,050
% of Total Gen Cont(G)	0.19%
D Commissioning Fees (Cx)	\$ 322,840
% of Total Gen Cont(G)	0.67%
E Estimated Basic Costs	\$ 46,307,541
F Estimated Additional Costs	\$ 1,829,872
G Total General Contract	\$ 48,137,413
% of Total Gen Cont(G)	4%
H Baseline Utilities Cost	\$ 519,318
I Metered Utilities Cost	Incomplete data
J Avoided Utility Cost	
K % Avoided Utility Cost	
Indoor Water (Gallons)	
Baseline Water Use	11,970,900
Metered Water Use	Incomplete data
Avoided Water Use	
% Avoided Water Use	
Total Additional Fees & Costs	
Additional Design Fees	\$ 91,100
Commissioning Fees (Cx)	\$ 322,840
Estimated Additional Costs	\$ 1,829,872
Total	\$ 2,243,812
% of Total Gen Cont(G)	5%

Gateway Residence Hall is a five floor building comprised of two wings that houses 720 students.

Gateway was accepted on August 10, 2015. This is the first year of meter data for Gateway.

Meter data is incomplete.

-Water meter data is not available for the first and last months of the recording period.

-Steam meter data is not available for the recording period. Not Available

Gateway does not meet the requirements of the legislation due to incomplete meter data.

(1) <http://www.usgbc.org/projects/east-carolina-university-belk-hall-0>

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

2015-2016 Performance Standards Review

UNC Charlotte

Oak Residence Hall Renovation



Basic Project Data		
Total Project Cost	\$	7,855,936
Project Size (SF)		52,844
Cost/Square Foot	\$	149
LEED Certification		None
Fees and Costs		
A Basic Design Fee	\$	591,176
B Additional Design Fees	\$	-
C Total Design Fee	\$	591,176
% of Total Gen Cont(G)		0.00%
D Commissioning Fees (Cx)	\$	77,500
% of Total Gen Cont(G)		1.08%
E Estimated Basic Costs	\$	6,778,438
F Estimated Additional Costs	\$	408,822
G Total General Contract	\$	7,187,260
% of Total Gen Cont(G)		6%
H Baseline Utilities Cost	\$	78,156
I Metered Utilities Cost		No data.
J Avoided Utility Cost		
K % Avoided Utility Cost		
Indoor Water (Gallons)		
Baseline Water Use		3,786,332
Metered Water Use		No data.
Avoided Water Use		
% Avoided Water Use		
Total Additional Fees & Costs		
Additional Design Fees	\$	-
Commissioning Fees (Cx)	\$	77,500
Estimated Additional Costs	\$	408,822
Total	\$	486,322
% of Total Gen Cont(G)		7%

Oak Residence Hall has four floors and 248 beds. Oak was accepted on August 24, 2015. This is the first year of meter data for Oak.

Meter data for Oak was not available in time for inclusion in the 2016 report.

Fees and Costs Defined:

- A Basic Design Fee: noted on the design contract or calculated from total design fee less additional design fees
- B Additional Design Fees: noted as LEED, SB 668, energy legislation, etc. on design contract (None used when no fees noted)
- C Total Design Fee: from the design contract (Fee does not include design amendments)
- D Commissioning Fees: contract amount with owner
- E Estimated Basic Costs: the total general contract less the estimated additional costs (E=G-F)
- F Estimated Additional Costs: from the designer's life cycle cost analysis
- G Total General Contract: from the construction contract (Amount does not include change orders)
- H Baseline Utilities Cost: from the designer's life cycle cost and energy model analysis
- I Metered Utilities Cost: meter data from the owner
- J Avoided Utility Cost: modeled utilities cost less actual utilities cost (J=H-I)
- K Percent Savings: percent savings calculated from the designer's modeled utility cost and the actual utility cost

Sustainable, Energy-Efficient Buildings Advisory Committee Members (*)

Committee Co-chairs:

Herb Stanford, Mechanical Engineer
Doug Brinkley, Architect, PBCL Architecture

Committee Members - Private Sector:

Renee Hutcheson, Architect, Small Kane Architects
Julie McLaurin, Architect, O'Brien Atkins
Ginger Scoggins, Mechanical Engineer, Engineered Designs
Jim Wise, Electrical Engineer, RMF Engineers

Committee Members - Public Sector:

Bill Laxton, Chief Deputy Secretary, DENR
Tom Hunter, System Facilities Engineer, NC Community College System
Bob Fraser, Architect, NCSU
Rod Rabold, UNC-Chapel Hill, NC Commissioning Committee Chair
Leonard Thagard, Mechanical Engineer, State Construction Office
Bob Powell, Architect, NC A&T Faculty
Jeff Tiller, Engineer, ASU Energy Center
Herb Eckerlin, Mechanical Engineering Faculty, NCSU
Tommy Harrill, State Construction Office, DOA

Committee Support Staff:

Hawley Truax, Office of the Governor
Speros Fleggas, Department of Administration
Larry Shirley, State Energy Office
Len Hoey, State Energy Office
Michael Hughes, State Construction Office
Greg Driver, State Construction Office
Jim Lora, Office of State Budget and Management

(*) Advisory Committee Member status from 2008.



References

1. SB 668, Session Law 2007-546: <http://www.ncleg.net/EnactedLegislation/SessionLaws/HTML/2007-2008/SL2007-546.html>
2. Advisory Committee Report: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/EEREPORT.pdf>
3. Procedures Flow Chart: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/Energy%20Efficient%20Bldgs%20Advance%20Planning%20Flow%20Chart.pdf>
4. A Review of Performance of “High Performance Buildings”: http://c.ymcdn.com/sites/www.usgbcnc.org/resource/collection/1E2E036D-03B5-45C9-9D02-1ABA4672953E/Session2_Track3_DENR.pdf
5. High Performance Buildings (HiPerB) Task Force: <http://deq.nc.gov/conservation/energy-efficiency-resources/utility-savings-initiative/high-performance-buildings>
6. State Construction Office homepage: <http://ncadmin.nc.gov/businesses/construction>
7. SCO Energy Benchmarking Project: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/SCOEnergyBenchmarkingProject.pdf>
8. Energy Efficient Lighting Guidance Document: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/State-of-NC-SSL-Guidance-Documents.pdf>
9. Solid State Lighting Presentation: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/LED%20Lighting%20Panel%20Discussion.pdf>
10. 2016 Appalachian Energy Summit: <http://sustain.appstate.edu/energy-summit>
11. NC Department of Environmental Quality, Utility Savings Initiative: <http://deq.nc.gov/conservation/energy-efficiency-resources/utility-savings-initiative>
12. Implementation Cost / Cost of LEED: http://www.josre.org/wp-content/uploads/2012/09/Cost_of_LEED_Analysis_of_Construction_Costs-JOSRE_v3-13.pdf
13. Daylighting: <http://www.wbdg.org/resources/daylighting.php>
14. HB 628 / Session Law 2013-242: <http://www.ncga.state.nc.us/Sessions/2013/Bills/House/PDF/H628v7.pdf>
15. EPA Energy Star Portfolio Manager: <http://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager>
16. ASHRAE Standard 100-2015: <https://www.ashrae.org/resources--publications/bookstore/standard-100>
17. 2012 NC Energy Conservation Code: http://www.ncdoi.com/OSFM/Engineering/BCC/Documents/2012_NCBuildingCode_amendments/2012NCEnergyConservation101214RRCOSBM.pdf
18. NC State Building Codes Amendments - Effective 1/1/2015, reference page 21 of 101: http://www.ncdoi.com/OSFM/Engineering_and_Codes/Documents/2012_NCBuildingCode_amendments/2012-2015ApprovedCumulative.pdf
19. ASHRAE Standard 90.1-2013: https://www.energycodes.gov/sites/default/files/documents/901-2013_finalCommercialDeterminationQuantitativeAnalysis_TSD.pdf
20. Life Cycle Cost Analysis for State Facilities October 1, 2001: <https://ncdoa.s3.amazonaws.com/s3fs-public/documents/files/LCCA%20Manual.doc>
21. Residential Energy Consumption Survey: <http://www.eia.gov/consumption/residential/data/2009/c&e/summary/xls/CE1.4%20South%20Summary%20Site.xlsx>

Photo Credits

<u>Page</u>	<u>Agency</u>	<u>Project</u>
Cover Page	UNC Charlotte	South Village Dining Facility
Page 2	Guilford Technical Community College	Aviation III Building
Page 4	UNC Wilmington	Student Recreation Center Renovation and Addition
Page 14	UNC Greensboro	William E. Moran Commons and Plaza
Page 15	Winston Salem State University	Center for Design Innovation
Page 95	NC Department of Agriculture and Consumer Services	SENC Agriculture Events Center
Page 97	NC State University	Talley Student Center

